37 FRISBY RD ANGLE VALE SA 5117

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Local Variation (TNV)

Concept Plan (16)

Concept Plan (17)

Concept Plan (81)

Overlay

Defence Aviation Area (All structures over 90 metres)

Hazards (Bushfire - Urban Interface)

Hazards (Flooding General)

Local Heritage Place

Major Urban Transport Routes

Non-stop Corridor

Prescribed Wells Area

Regulated and Significant Tree

Traffic Generating Development

Water Resources

Zone

Employment

Development Pathways

Employment

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the

- Water tank (underground)
- 2. Code Assessed Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

· Temporary accommodation in an area affected by bushfire

${\it 3. \,\, Code \,\, Assessed \,\, - \,\, Performance \,\, Assessed}$

Performance Assessed development types listed below are those for which the Code identifies relevant policies.

Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information

- Advertisement
- · Consulting room
- Demolition
- Land division
- Light industry Office
- · Retaining wall
- Service trade premises
- Shop
- Store
- Telecommunications facility
- Warehouse

4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Page 1 of 102 Printed on 3/02/2022

Part 2 - Zones and Sub Zones

Employment Zone

Assessment Provisions (AP)

	Desired Outcome	
DO 1	A diverse range of low-impact light industrial, commercial and business activities that complement the role of other zones accommodating significant industrial, shopping and business activities.	
DO 2	Distinctive building, landscape and streetscape design to achieve high visual and environmental amenity particularly along arterial roads, zone boundaries and public open spaces.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Use	and Intensity	
PO 1.1	DTS/DPF 1.1	
A range of employment-generating light industrial, service trade, motor repair and other compatible businesses servicing the local community that do not produce emissions that would detrimentally affect local amenity.	Development comprises one or more of the following: (a) Advertisement (b) Consulting room (c) Indoor recreation facility (d) Light industry (e) Motor repair station (f) Office (g) Place of worship (h) Research facility (i) Retail fuel outlet (j) Service trade premises (k) Shop (l) Store (m) Telecommunications facility (n) Training facility (o) Warehouse.	
P01.2	DTS/DPF 1.2	
Shops provide convenient day-to-day services and amenities to local businesses and workers, support the sale of products manufactured on-site and otherwise complement the role of Activity Centres.	Shop where one of the following applies: (a) with a gross leasable floor area up to 100m² (b) is a bulky goods outlet (c) is a restaurant (d) is ancillary to and located on the same allotment as an industry and primarily involves the sale by retail of goods manufactured by the industry.	
P01.3	DTS/DPF 1.3	
Telecommunication facilities located to mitigate impacts on visual amenity in residential areas.	Telecommunications facility in the form of a monopole: (a) up to a height of 30m (b) no closer than 50m to a neighbourhood-type zone.	
PO 1.4	DTS/DPF 1.4	
Bulky good outlets and standalone shops are located to provide convenient access.	Bulky goods outlets and standalone shops are located on sites with a frontage to a State Maintained Road.	
Built Form	and Character	
P0 2.1	DTS/DPF 2.1	
Development achieves distinctive building, landscape and streetscape design to achieve high visual and environmental amenity particularly along arterial roads, zone boundaries and public open spaces.	None are applicable.	
P0 2.2	DTS/DPF 2.2	
Building facades facing a boundary of a zone primarily intended to accommodate residential development, public roads, or public open space incorporate design elements to add visual interest by considering the following:	None are applicable.	
(a) using a variety of building finishes		

Page 2 of 102 Printed on 3/02/2022

avoiding elevations that consist solely of metal cladding (c) using materials with a low reflectivity (d) using techniques to add visual interest and reduce large expanses of blank walls including modulation and incorporation of offices and showrooms along elevations visible to a public road. Building height and setbacks PO 3.1 DTS/DPF 3.1 Buildings are set back from the primary street boundary to contribute to the The building line of a building set back from the primary street boundary: existing/emerging pattern of street setbacks in the streetscape. at least the average setback to the building line of existing buildings on adjoining sites which face the same primary street (including those buildings that would adjoin the site if not separated by a public road or a vacant allotment) where there is only one existing building on adjoining sites which face the same primary street (including those that would adjoin if not separated by a public road or a vacant allotment), not less than the setback to the building line of that building not less than 3m where no building exists on an adjoining site with the same primary street frontage. PO 3.2 DTS/DPF 3.2 Buildings are set back from a secondary street boundary to accommodate the provision of Building walls are no closer than 2m to the secondary street boundary. landscaping between buildings and the street to enhance the appearance of land and buildings when viewed from the street. PO 3.3 DTS/DPF 3.3 Buildings are set back from rear access ways to provide adequate manoeuvrability for Building walls are set back from the rear access way: vehicles to enter and exit the site. where the access way is 6.5m wide or more, no requirement (b) where the access way is less than 6.5m wide, the distance equal to the additional width required to make the access way at least 6.5m wide. PO 3.4 Buildings are sited to accommodate vehicle access to the rear of a site for deliveries, Building walls are set back at least 3m from at least one side boundary, unless an maintenance and emergency purposes. alternative means for vehicular access to the rear of the site is available. PO 3.5 DTS/DPF 3.5 Building height is consistent with the form expressed in any relevant Maximum Building Building height is not greater than: Height (Levels) Technical and Numeric Variation layer, and is otherwise generally low-rise to the following: complement the established streetscape and local character. in all other cases (i.e. there are blank fields for both maximum building height (metres) and maximum building height (levels)) - 2 building levels up to a height of In relation to DTS/DPF 3.5, in instances where: more than one value is returned in the same field for DTS/DPF 3.5(a) refer to the Maximum Building Height (Levels) Technical and Numeric Variation layer or Maximum Building Height (Metres) Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development only one value is returned for DTS/DPF 3.1(a) (i.e. there is one blank field), then the relevant height in metres or building levels applies with no criteria for the other. Buildings mitigate visual impacts of building massing on residential development within a Buildings are constructed within a building envelope provided by a 45 degree plane, neighbourhood-type zone measured from a height of 3m above natural ground level at the boundary of an allotment used for residential purposes in a neighbourhood-type zone as shown in the following diagram, except where the relevant boundary is a southern boundary or where this boundary is the primary street boundary. LEGEND BUILDING ENVELOPE PO 3.7 DTS/DPF 3.7 Buildings mitigate overshadowing of residential development within a neighbourhood-type Buildings on sites with a southern boundary adjoining an allotment used for residential purposes within a neighbourhood-type zone are constructed within a building envelope

Page 3 of 102 Printed on 3/02/2022

provided by a 30 degree plane grading north measured from a height of 3m above natural ground level at the southern boundary, as shown in the following diagram: PO 3.8 DTS/DPF 3.8 Buildings on an allotment fronting a road that is not a State maintained road, and where None are applicable. land on the opposite side of the road is within a neighbourhood-type zone, provides an orderly transition to the built form scale envisaged in the adjacent zone to complement the streetscape character. Site Dimensions and Land Division DTS/DPF 4.1 PO 4.1 Land division creates allotments that vary in size and are suitable for a variety of Allotments: commercial and business activities connected to an approved common wastewater disposal service have an area of 1250m² or more and a frontage width of 20m or more that will require the disposal of wastewater on-site have an area of 2000m² or more and a frontage width of 20m or more. Landscaping PO 5.1 DTS/DPF 5.1 Landscaping is provided to enhance the visual appearance of development when viewed Other than to accommodate a lawfully existing or authorised driveway or access point, or from public roads and thoroughfares. an access point for which consent has been granted as part of an application for the division of land, a landscaped area is provided within the development site: where a building is set back less than 3m from the street boundary - 1m wide or the area remaining between the relevant building and the street boundary where the building is less than 1m from the street boundary in any other case - at least 1.5m wide. PO 5.2 DTS/DPF 5.2 Development incorporates areas for landscaping to enhance the overall amenity of the site Landscape areas comprise: and locality. not less than 10 percent of the site a dimension of at least 1.5m. Advertisements DTS/DPF 6.1 Freestanding advertisements are not visually dominant within the locality. Freestanding advertisements: do not exceed 6m in height above natural ground level (b) do not have a face that exceeds 8m². Concept Plans PO 7.1 DTS/DPF 7.1 Development is compatible with the outcomes sought by any relevant Concept Plan The site of the development is wholly located outside any relevant Concept Plan boundary. contained within Part 12 - Concept Plans of the Planning and Design Code to support the The following Concept Plans are relevant: orderly development of land through staging of development and provision of Description infrastructure Concept Plan 17 - Angle Vale Concept Plan 16 - Angle Vale Infrastructure Concept Plan 81 - Edinburgh Defence Airfield Lighting Constraints In relation to DTS/DPF 7.1, in instances where: one or more Concept Plan is returned, refer to Part 12 - Concept Plans in the $\,$ Planning and Design Code to determine if a Concept Plan is relevant to the site of

Page 4 of 102 Printed on 3/02/2022

the proposed development. Note: multiple concept plans may be relevant.

(b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 7.1 is met.

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class of Development	Exceptions (Column B)	
Column A)		
 A kind of development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development. 	None specified.	
2. Any development involving any of the following (or of any combination of any of the following): (a) advertisement (b) air handling unit, air conditioning system or exhaust fan (c) building on railway land (d) carport (e) fence (f) outbuilding (g) retaining wall (h) shade sail (i) solar photovoltaic panels (roof mounted) (j) temporary public service depot (k) verandah (l) water tank.	Except development that exceeds the maximum building height specified in Employment Zone DTS/DPF 3.5 or does not satisfy any of the following: 1. Employment Zone DTS/DPF 3.6 2. Employment Zone DTS/DPF 3.7.	
3. Any development involving any of the following (or of any combination of any or the following): (a) consulting room (b) light industry (c) office (d) motor repair station (e) retail fuel outlet (f) store (g) warehouse.	Except where the site of the development is adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone.	
4. Any development involving any of the following (or of any combination of any of the following): (a) internal building works (b) land division (c) replacement building (d) temporary accommodation in an area affected by bushfire (e) tree damaging activity.	f None specified.	
5. Demolition.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay	
6. Shop within any of the following: (a) Retail Activity Centre Subzone (b) Roadside Service Centre Subzone.	Except shop that exceeds the maximum building height specified in Employment Zone DTS/DPF 3.5 or does not satisfy any of the following: 1. Employment Zone DTS/DPF 3.6 2. Employment Zone DTS/DPF 3.7.	
7. Shop.	Except: 1. where the site of the shop is adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone or 2. shop that exceeds the maximum building height specified in Employment Zone DTS/DPF 3.5 or 3. shop that does not satisfy Employment Zone DTS/DPF 1.2.	

Page 5 of 102 Printed on 3/02/2022

8. Telecommunications facility.	Except telecommunications facility that does not satisfy Employment Zone DTS/DPF 1.3.	
Placement of Notices - Exemptions for Performance Assessed Development		
None specified.		
Placement of Notices - Exemptions for Restricted Development		
None specified.		

Part 3 - Overlays

Defence Aviation Area Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operations of Defence Aviation Areas.	Building height does not exceed the relevant height specified by the <i>Defence Aviation Area Overlay</i> .
PO 1.2	DTS/DPF 1.2
Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with Defence Aviation Areas.	Development does not include exhaust stacks.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Hazards (Bushfire - Urban Interface) Overlay

Assessment Provisions (AP)

	Desired Outcome	
DO 1	Urban neighbourhoods that adjoin areas of General, Medium and High Bushfire Risk:	
	 (a) allow access through to bushfire risk areas (b) are designed to protect life and property from the threat of bushfire and the dangers posed by ember attack (c) facilitate evacuation to areas safe from bushfire danger. 	

 $Performance\ Outcomes\ (PO)\ and\ Deemed-to-Satisfy\ (DTS)\ Criteria\ /\ Designated\ Performance\ Feature\ (DPF)$

Performance Outcome Deemed-to-Satisfy Criteria / Designated

Policy24 - Enquiry		
	Performance Feature	
Land	Division	
PO 1.1	DTS/DPF 1.1	
Land division creating public roads or resulting in 10 or more new allotments is designed to make provision for emergency vehicle access through to the bushfire risk area.	Land division creates less than 10 allotments and/or does not involve the creation of public roads.	
P0 1.2	DTS/DPF 1.2	
Land division is designed to provide a continuous street pattern to facilitate the safe movement and evacuation of emergency vehicles, residents, occupants and visitors.	Land division does not involve the creation of public roads.	
PO 1.3	DTS/DPF 1.3	
Where 10 or more new allotments are proposed, land division includes at least two separate and safe exit points to enable multiple avenues of evacuation in the event of a bushfire.	Land division creates less than 10 allotments.	
PO 1.4	DTS/DPF 1.4	
Land division creating public roads or resulting in 10 or more new allotments incorporates perimeter roads of adequate design in conjunction with bushfire buffer zones to achieve adequate separation between residential allotments and areas of unacceptable bushfire risk and to support safe access for the purposes of fire-fighting.	Land division creates less than 10 allotments and/or does not involve the creation of public roads.	
PO 1.5	DTS/DPF 1.5	
Land division does not rely on fire tracks as means of evacuation or access for fire-fighting purposes unless there are no safe alternatives available.	Land division does not create or rely on fire tracks.	
PO 1.6	DTS/DPF1.6	
Land division resulting in 10 or more new allotments and within 100m a Hazards (Bushfire - General Risk) Overlay, Hazards (Bushfire - Hedium Risk) Overlay or Hazards (Bushfire - High Risk) Overlay is designed and incorporates measures to minimise the danger of fire hazard to residents and occupants of buildings, and to protect buildings and property from physical damage in the event of a bushfire.	Land division is not located within 100m of a Hazards (Bushfire - General Risk) Overlay, Hazards (Bushfire - Medium Risk) Overlay or Hazards (Bushfire - High Risk) Overlay or does not create 10 or more new allotments.	
Vehicle Access - Roads,	Driveways and Fire Tracks	
P0 2.1	DTS/DPF 2.1	
Roads that are within 100 metres of a Hazards (Bushfire - General Risk) Overlay, Hazards (Bushfire - Medium Risk) Overlay or Hazards (Bushfire - High Risk) Overlay are designed and constructed to facilitate the safe and effective:	Any proposed new roads are not within 100m of a Hazards (Bushfire - General Risk) Overlay, Hazards (Bushfire - Medium Risk) Overlay or Hazards (Bushfire - High Risk) Overlay or	
(a) access, operation and evacuation of fire-fighting vehicles and emergency	(a) are constructed with a formed, all-weather surface	
personnel (b) evacuation of residents, occupants and visitors.	 (b) have a gradient of not more than 16 degrees (1-in-3.5) at any point along the road (c) have a cross fall of not more than 6 degrees (1-in-9.5) at any point along the road (d) have a minimum formed road width of 6m 	
	(e) provide overhead clearance of not less than 4.0m between the road surface and overhanging branches or other obstructions including buildings and/or structures (Figure 1)	
	 (f) allow fire-fighting services (personnel and vehicles) to travel in a continuous forward movement around road curves by constructing the curves with a minimum external radius of 12.5m (Figure 2) 	
	(g) incorporating cul-de-sac endings or dead end roads do not exceed 200m in length and the end of the road has either: (i) a turning area with a minimum formed outfloor radius of 12 Em (Figure 2)	
	 (i) a turning area with a minimum formed surface radius of 12.5m (Figure 3) or (ii) a 'T' or 'Y' shaped turning area with a minimum formed surface length of 11m and minimum internal radii of 9.5m (Figure 4) 	
	(h) incorporate solid, all-weather crossings over any watercourse that support fire-fighting vehicles with a gross vehicle mass (GVM) of 21 tonnes.	

Procedural Matters (PM) - Referrals


The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Figures and Diagrams

Fire Engine and Appliance Clearances

Figure 1 - Overhead and Side Clearances

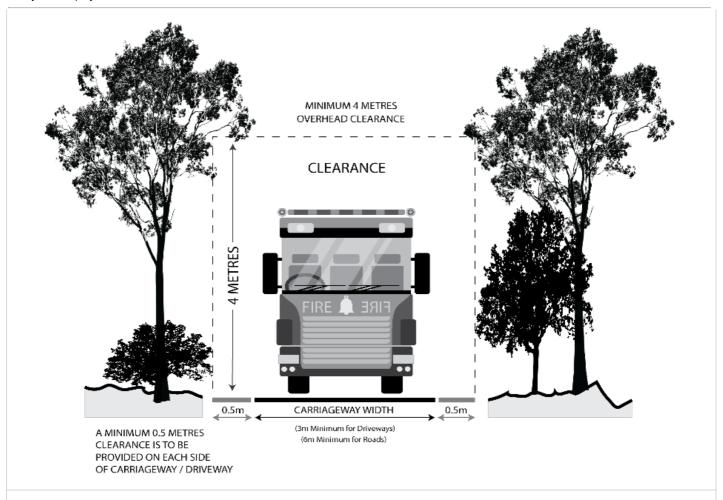

Roads and Driveway Design

Figure 2 - Road and Driveway Curves


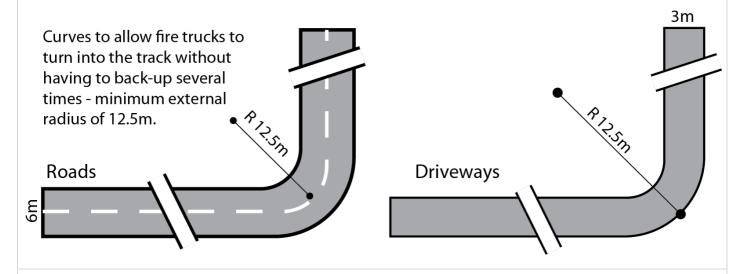


Figure 3 - Full Circle Turning Area

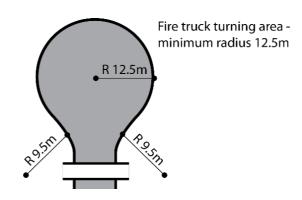

Page 8 of 102 Printed on 3/02/2022

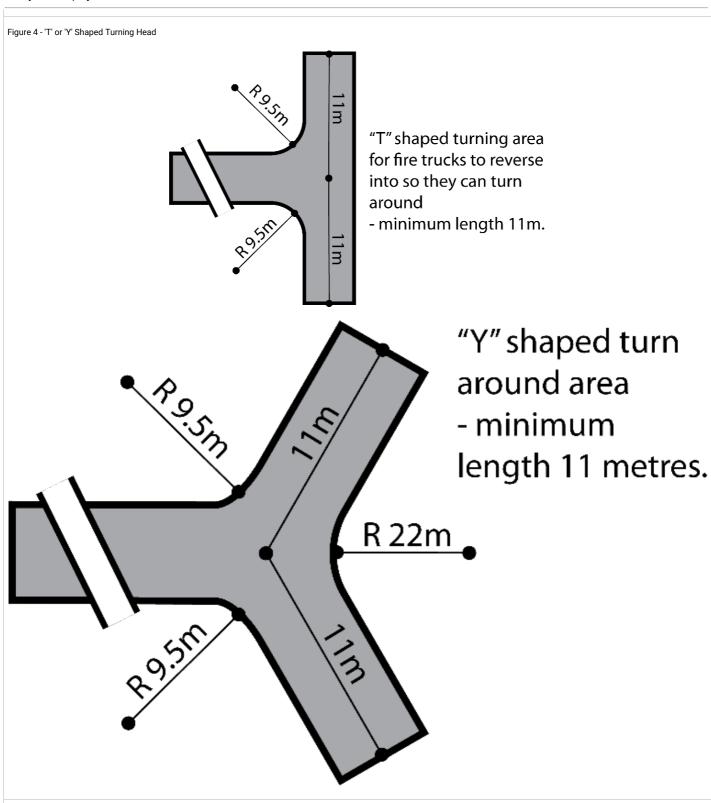


Figure 5 - Driveway Passing Bays

Page 9 of 102 Printed on 3/02/2022

Passing bay for fire trucks - minimum width 6 metres, minimum length 17 metres.

Hazards (Flooding - General) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Impacts on people, property, infrastructure and the environment from general flood risk are minimised through the appropriate siting and design of development.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Lan	d Use
Po 1.1 Buildings housing vulnerable people, community services facilities, key infrastructure and emergency services are sited away from flood areas enable uninterrupted operation of services and reduce likelihood of entrapment. DTS/DPF 1.1 Pre-schools, educational establishments, retirement and suppose emergency services facilities, hospitals and prisons located ou event.	
Flood R	Resilience
P0.2.1 Development is sited, designed and constructed to prevent the entry of floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	DTS/DPF 2.1 Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished ground and floor level not less than: In instances where no finished floor level value is specified, a building incorporates a finished floor level at least 300mm above the height of a 1% AEP flood event.
Environmen	tal Protection
PO 3.1 Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building during a 1% AEP flood event to avoid potential environmental harm.	DTS/DPF 3.1 Development involving the storage or disposal of hazardous materials is wholly located outside of the 1% AEP flood plain or flow path.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Local Heritage Place Overlay

Page 10 of 102 Printed on 3/02/2022

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development maintains the heritage and cultural values of Local Heritage Places through conservation, ongoing use and adaptive reuse.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
P01.1	DTS/DPF 1.1
The form of new buildings and structures maintains the heritage values of the Local Heritage Place.	None are applicable.
PO 1.2	DTS/DPF 1.2
Massing, scale and siting of development maintains the heritage values of the Local Heritage Place.	None are applicable.
PO 1.3	DTS/DPF 1.3
Design and architectural detailing (including but not limited to roof pitch and form, openings, chimneys and verandahs) maintains the heritage values of the Local Heritage Place.	None are applicable.
PO 1.4	DTS/DPF 1.4
Development is consistent with boundary setbacks and setting.	None are applicable.
P0 1.5	DTS/DPF 1.5
Materials and colours are either consistent with or complement the heritage values of the Local Heritage Place.	None are applicable.
PO 1.6	DTS/DPF 1.6
New buildings and structures are not placed or erected between the primary or secondary street boundaries and the façade of a Local Heritage Place.	None are applicable.
PO 1.7	DTS/DPF 1.7
Development of a Local Heritage Place retains features contributing to its heritage value.	None are applicable.
Alterations a	and Additions
PO 2.1	DTS/DPF 2.1
Alterations and additions complement the subject building and are sited to be unobtrusive, not conceal or obstruct heritage elements and detailing, or dominate the Local Heritage Place or its setting.	None are applicable.
P0 2.2	DTS/DPF 2.2
Adaptive reuse and revitalisation of Local Heritage Places to support their retention in a manner that respects and references the original use of the Local Heritage Place.	None are applicable.
Ancillary D	evelopment
PO 3.1	DTS/DPF 3.1
Ancillary development, including carports, outbuildings and garages, complements the heritage values of the Local Heritage Place.	None are applicable.
PO 3.2	DTS/DPF 3.2
Ancillary development, including carports, outbuildings and garages, is located behind the building line and does not dominate the Local Heritage Place or its setting.	None are applicable.
PO 3.3	DTS/DPF 3.3
Advertising and advertising hoardings are designed to complement the Local Heritage Place, be unobtrusive, be below the parapet line, not conceal or obstruct heritage elements and detailing, or dominate the building or its setting.	None are applicable.
P0 3.4	DTS/DPF 3.4
Fencing and gates closer to a street boundary (other than a laneway) than the street	None are applicable.

Page 11 of 102 Printed on 3/02/2022

Policy24 - Enquiry

elevation of the associated building are consistent with the traditional period, style and form of the Local Heritage Place.			
Land D	Division		
PO 4.1	DTS/DPF 4.1		
Land division creates allotments that:	None are applicable.		
maintain the heritage values of the Local Heritage Place, including setting are of a dimension to accommodate new development that reinforces and is compatible with the heritage values of the Local Heritage Place.			
Landscape Context an	d Streetscape Amenity		
PO 5.1	DTS/DPF 5.1		
Individually heritage listed trees, parks, historic gardens and memorial avenues are retained unless:	None are applicable.		
(a) trees / plantings are, or have the potential to be, a danger to life or property or			
(b) trees / plantings are significantly diseased and their life expectancy is short.			
Demo	olition		
PO 6.1	DTS/DPF 6.1		
Local Heritage Places are not demolished, destroyed or removed in total or in part unless:	None are applicable.		
(a) the portion of the Local Heritage Place to be demolished, destroyed or removed is excluded from the extent of listing that is of heritage value or			
(b) the structural integrity or condition of the Local Heritage Place represents an unacceptable risk to public or private safety and is irredeemably beyond repair.			
P0 6.2	DTS/DPF 6.2		
The demolition, destruction or removal of a building, portion of a building or other feature or attribute is appropriate where it does not contribute to the heritage values of the Local Heritage Place.	None are applicable.		
Conservation Works			
P0 7.1	DTS/DPF 7.1		
Conservation works to the exterior of a Local Heritage Place (and other features identified in the extent of listing) match original materials to be repaired and utilise traditional work methods.	None are applicable.		

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Major Urban Transport Routes Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Safe and efficient operation of Major Urban Transport Routes for all road users.
DO 2	Provision of safe and efficient access to and from Major Urban Transport Routes.

 $Performance\ Outcomes\ (PO)\ and\ Deemed\ to\ Satisfy\ (DTS)\ /\ Designated\ Performance\ Feature\ (DPF)\ Criteria$

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	Access - Safe Entry and Exit (Traffic Flow)
P0 1.1	DTS/DPF 1.1
Access is designed to allow safe entry and exit to and	An access point satisfies (a), (b) or (c):

Page 12 of 102 Printed on 3/02/2022

from a site to meet the needs of development and minimise traffic flow interference associated with access movements along adjacent State Maintained Roads.

- (a) where servicing a single (1) residential dwelling / residential allotment:
 - (i) it will not result in more than one access point
 - (ii) vehicles can enter and exit the site in a forward direction
 - (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
 - (iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road
 - (v) have a width of between 3m and 4m (measured at the site boundary).
- (b) where the development will result in 2 and up to 6 dwellings:
 - (i) it will not result in more than one access point servicing the development site
 - (ii) entry and exit movements are left turn only
 - (iii) vehicles can enter and exit the site in a forward direction
 - (iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees;
 - (v) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road
 - (vi) have a width of between 5.8m to 6m (measured at the site boundary) and an access depth of 6m (measured from the site boundary into the site).
- (c) where the development will result in over 7 dwellings, or is a non-residential land use:
 - (i) it will not result in more than one access point servicing the development site
 - vehicles can enter and exit the site using left turn only movements
 - (iii) vehicles can enter and exit the site in a forward direction
 - (iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
 - (v) have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length of 6.4m or less
 - vi) have a width of between 6m and 9m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to 8.8m
 - (vii) have a width of between 9m and 12m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m
 - (viii) provides for simultaneous two-way vehicle movements at the access;
 - A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road

and

3. with entry movements of 8.8m vehicles (where relevant) being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles do not cross the centreline of the road.

Access - On-Site Queuing


PO 2.1

Sufficient accessible on-site queuing adjacent to access points is provided to meet the needs of development so that all vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption of the functional performance of the road and maintain safe vehicle movements.

DTS/DPF 2.1


An access point in accordance with one of the following:

will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways, intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site).
- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of, or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - (iv) all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the largest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:

Page 13 of 102 Printed on 3/02/2022



Access - Location (Spacing) - Existing Access Points

PO 3.1

Existing access points designed to accommodate the type and volume of traffic likely to be generated by the development.

DTS/DPF 3.1

An existing access point satisfies (a), (b) or (c):

- (a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in a larger class of vehicle expected to access the site using the existing access
- (c) it is not located on a Controlled Access Road and development constitutes:
 - change of use between an office less than 500m² gross leasable floor area and a consulting room less than 500m² gross leasable floor area or vice versa
 - (ii) change in use from a shop to an office, consulting room or personal or domestic services establishment
 - (iii) change of use from a consulting room or office less than 250m² gross leasable floor area to shop less than 250m² gross leasable floor area
 - (iv) change of use from a shop less than 500m² gross leasable floor area to a warehouse less than 500m² gross leasable floor area
 - v) an office or consulting room with a gross leasable floor area less than 500m².

Access - Location (Spacing) - New Access Points


PO 4.1

New access points are spaced apart from any existing access point or public road junction to manage impediments to traffic flow and maintain safe and efficient operating conditions on the road.

DTS/DPF 4.1

A new access point satisfies (a), (b) or (c):

where a development site is intended to serve between 1 and 6 dwellings and has frontage to a local road (not being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:



NOTE:

OTE: he points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an unkinded road. On a divided road dismarker X X extended to Point X.

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing.
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
50 km/h or	No spacing requirement	20m
less		
60 km/h	40m	123m
70 km/h	55m	151m
80 km/h	70m	181m
90 km/h	90m	214m
100 km/h	110m	248m
110 km/h	135m	285m

Page 14 of 102 Printed on 3/02/2022

Access - Location (Sight Lines)

PO 5.1

PO 10.1

Development is located and designed to maintain

junctions to contribute to driver safety.

sightlines for drivers turning into and out of public road


Access points are located and designed to accommodate sight lines that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled and safe manner.

DTS/DPF 5.1


An access point satisfies (a) or (b):

(a) drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Access Point serving 1-6 dwellings	Access point serving all other development
40 km/h or less	40m	73m
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m



(b) pedestrian sightlines in accordance with the following diagram:

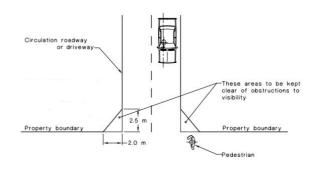

Access - Mud and Debris		
PO 6.1 Access points constructed to minimise mud or other debris being carried or transferred onto the road to ensure safe road operating conditions.	DTS/DPF 6.1 Where the road has an unsealed shoulder and the road is not kerbed the access way is sealed from the edge of seal on the road for a minimum of 10m or to the property boundary (whichever is closer)	
	Access - Stormwater	
PO 7.1	DTS/DPF 7.1	
Access points designed to minimise negative impact on roadside drainage of water.	Development does not: (a) decrease the capacity of an existing drainage point (b) restrict or prevent the flow of stormwater to an existing drainage point and system.	
	Building on Road Reserve	
P0 8.1 Buildings or structures that encroach onto, above or below road reserves designed and sited to minimise impact on safe movements by all road users. DTS/DPF 8.1 No encroachment of buildings or structures onto, above or below the road reserve.		
Public Road Junctions		
P0 9.1	DTS/DPF 9.1	
New junctions with public roads (including the opening of unmade public road junctions) or modifications to existing road junctions located and designed to ensure safe and efficient road operating conditions are maintained on the State Maintained Road.	Development does not comprise any of the following: (a) creating a new junction with a public road (b) opening an unmade public road junction (c) modifying an existing public road junction.	


Page 15 of 102 Printed on 3/02/2022

Corner Cut-Offs

Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off

DTS/DPF 10.1

Area' in the following diagram:

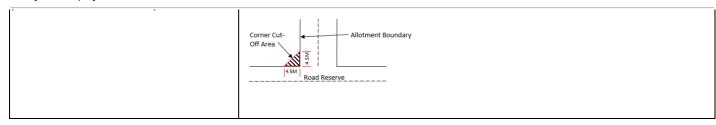

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Non-Stop Corridors Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Safe and efficient operation of non-stop corridors, where free-flowing traffic movement is prioritised.

 $Performance\ Outcomes\ (PO)\ and\ Deemed\ to\ Satisfy\ (DTS)\ /\ Designated\ Performance\ Feature\ (DPF)\ Criteria$

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Non-Stop Corridor Overlay		
P0 1.1	DTS/DPF 1.1	
The safety, efficiency and functional performance of non-stop corridors is maintained.	None are applicable.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a Non-Stop Corridor Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Page 16 of 102 Printed on 3/02/2022

Except where all of the relevant deemed-to-satisfy criteria are met, an advertisement or advertising hoarding that is on a Non-Stop Corridor Road or is on land abutting a Non-Stop Corridor Road and: (a) is within 100m of an on or off ramp to a Non-Stop Corridor Road as shown in the Non-Stop Corridors Overlay and (b) will: (i) be internally illuminated or (ii) incorporate a moving or changing display or message or (iii) incorporate a flashing light.	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.
---	---------------------------	---	--

Prescribed Wells Area Overlay

Assessment Provisions (AP)

Desired Outcome	
DO 1	Sustainable water use in prescribed wells areas.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
P01.1	DTS/DPF 1.1
All development, but in particular involving any of the following: (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.	Development satisfies either of the following: (a) the applicant has a current water licence in which sufficient spare capacity exists to accommodate the water needs of the proposed use or (b) the proposal does not involve the taking of water for which a licence would be required under the Landscape South Australia Act 2019.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class	of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
water grante (a) (b) (c) (d) (e) (f)	the following classes of development that require or may require to be taken in addition to any allocation that has already been d under the Landscape South Australia Act 2019: horticulture activities requiring irrigation aquaculture industry intensive animal husbandry commerical forestry. ercial forestry that requires a forest water licence under Part 8 in 6 of the Landscape South Australia Act 2019.	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Regulated and Significant Tree Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.

Page 17 of 102 Printed on 3/02/2022

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Tree Retent	ion and Health
P0 1.1	DTS/DPF 1.1
Regulated trees are retained where they:	None are applicable.
(a) make an important visual contribution to local character and amenity (b) are indigenous to the local area and listed under the <i>National Parks and Wildlife Act 1972</i> as a rare or endangered native species and / or (c) provide an important habitat for native fauna.	
PO 1.2	DTS/DPF 1.2
Significant trees are retained where they:	None are applicable.
 (a) make an important contribution to the character or amenity of the local area (b) are indigenous to the local area and are listed under the National Parks and Wildlife Act 1972 as a rare or endangered native species (c) represent an important habitat for native fauna (d) are part of a wildlife corridor of a remnant area of native vegetation (e) are important to the maintenance of biodiversity in the local environment and / or (f) form a notable visual element to the landscape of the local area. 	
PO 1.3 A tree damaging activity not in connection with other development satisfies (a) and (b):	DTS/DPF 1.3 None are applicable.
(a) tree damaging activity is only undertaken to: (i) remove a diseased tree where its life expectancy is short (ii) mitigate an unacceptable risk to public or private safety due to limb drop or the like (iii) rectify or prevent extensive damage to a building of value as comprising any of the following: A. a Local Heritage Place B. a State Heritage Place C. a substantial building of value and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity (iv) reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire (v) treat disease or otherwise in the general interests of the health of the tree and / or (vi) maintain the aesthetic appearance and structural integrity of the tree (b) in relation to a significant tree, tree-damaging activity is avoided unless all reasonable remedial treatments and measures have been determined to be ineffective.	
PO 1.4	DTS/DPF 1.4
A tree-damaging activity in connection with other development satisfies all the following: (a) it accommodates the reasonable development of land in accordance with the relevant zone or subzone where such development might not otherwise be possible (b) in the case of a significant tree, all reasonable development options and design solutions have been considered to prevent substantial tree-damaging activity occurring.	None are applicable.
Ground work	affecting trees
PO 2.1 Regulated and significant trees, including their root systems, are not unduly compromised by excavation and / or filling of land, or the sealing of surfaces within the vicinity of the tree to support their retention and health.	DTS/DPF 2.1 None are applicable.
Land	Division
PO 3.1 Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.	DTS/DPF 3.1 Land division where: (a) there are no regulated or significant trees located within or adjacent to the plan of

Page 18 of 102 Printed on 3/02/2022

	division
(b)	or the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree protection zone around any regulated tree within and adjacent to the plan of division.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Traffic Generating Development Overlay

Assessment Provisions (AP)

Desired Outcome	
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Traffic Genera	ting Development
P0 1.1	DTS/DPF 1.1
Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:
	(a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
P0 1.2	DTS/DPF 1.2
Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:
	(a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
PO 1.3	DTS/DPF 1.3
Sufficient accessible on-site queuing provided to meet the needs of the development so that queues do not impact on the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:
	(a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.

Page 19 of 102 Printed on 3/02/2022

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity		Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are me following classes of development that are proposed within 250n Maintained Road: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,0 more (c) retail development with a gross floor area of 2,000m² or (d) a warehouse or transport depot with a gross leasable flot 8,000m² or more (e) industry with a gross floor area of 20,000m² or more (f) educational facilities with a capacity of 250 students or	n of a State 100m ² or more por area of	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Water Resources Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.		
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water C	atchment
PO 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
P0 1.2	DTS/DPF 1.2
Development avoids interfering with the existing hydrology or water regime of swamps and wetlands other than to improve the existing conditions to enhance environmental values.	None are applicable.
PO 1.3	DTS/DPF 1.3
Wetlands and low-lying areas providing habitat for native flora and fauna are not drained, except temporarily for essential management purposes to enhance environmental values.	None are applicable.
PO 1.4	DTS/DPF 1.4
Watercourses, areas of remnant native vegetation, or areas prone to erosion that are capable of natural regeneration are fenced off to limit stock access.	None are applicable.
PO 1.5	DTS/DPF 1.5
Development that increases surface water run-off includes a suitably sized strip of vegetated land on each side of a watercourse to filter runoff to: (a) reduce the impacts on native aquatic ecosystems (b) minimise soil loss eroding into the watercourse.	A strip of land 20m or more wide measured from the top of existing banks on each side of the watercourse is free from development, livestock use and revegetated with locally indigenous vegetation.
PO 1.6	DTS/DPF 1.6
Development resulting in the depositing or placing of an object or solid material in a watercourse or lake occurs only where it involves any of the following:	None are applicable.
(a) the construction of an erosion control structure	

Page 20 of 102 Printed on 3/02/2022

Policy24 - Enquiry

(b) devices or structures used to extract or regulate water flowing in a watercourse (c) devices used for scientific purposes (d) the rehabilitation of watercourses.	
P01.7	DTS/DPF 1.7
Watercourses, floodplains (1% AEP flood extent) and wetlands protected and enhanced by retaining and protecting existing native vegetation.	None are applicable.
PO 1.8	DTS/DPF 1.8
Watercourses, floodplains (1% AEP flood extent) and wetlands are protected and enhanced by stabilising watercourse banks and reducing sediments and nutrients entering the watercourse.	None are applicable.
PO 1.9	DTS/DPF 1.9
Dams, water tanks and diversion drains are located and constructed to maintain the quality and quantity of flows required to meet environmental and downstream needs.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

	Desired Outcome
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Арре	arance
P0 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following: (a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above parapet height B. are not attached to the roof of the building (c) where they are not flush with a wall: (i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (ii) if attached to a two-storey building: A. has no part located above the finished floor level of the second storey of the building B. does not protrude beyond the outer limits of any verandah structure below C. does not have a sign face that exceeds 1m2 per side.

Page 21 of 102 Printed on 3/02/2022

	(d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy: (i) are flush with a wall (ii) do not have any part rising above parapet height (iii) are not attached to the roof of the building. (g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building (i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which they are attached.
PO 1.2	DTS/DPF 1.2
Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	Where development comprises an advertising hoarding, the supporting structure is: (a) concealed by the associated advertisement and decorative detailing or (b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.
P0 1.3	DTS/DPF 1.3
Advertising does not encroach on public land or the land of an adjacent allotment.	Advertisements and/or advertising hoardings are contained within the boundaries of the site.
P0 1.4	DTS/DPF 1.4
Where possible, advertisements on public land are integrated with existing structures and	Advertisements on public land that meet at least one of the following:
infrastructure.	(a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.
PO 1.5	DTS/DPF 1.5
Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	None are applicable.
Proliferation of	Advertisements
P0 2.1	DTS/DPF 2.1
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.
PO 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
P0 2.3 Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	DTS/DPF 2.3 Advertisements satisfy all of the following: (a) are attached to a building (b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they are attached
	(c) do not result in more than one sign per occupancy that is not flush with a wall.
Advertisi	ng Content
P0 3.1	DTS/DPF 3.1
Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.
Amenit	y Impacts
P0 4.1	DTS/DPF 4.1
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.
	fety T
P0 5.1	DTS/DPF 5.1
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.
P0 5.2	DTS/DPF 5.2
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.
P0 5.3	DTS/DPF 5.3

Page 22 of 102 Printed on 3/02/2022

Policy24 - Enquiry			
Advertisements and/or advertising hoardings do not create a hazard to drivers by:	Advertisements satisfy all of the following:		
being liable to interpretation by drivers as an official traffic sign or signal obscuring or impairing drivers' view of official traffic signs or signals obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings.	(a) are not located in a public road or rail reserve are located wholly outside the land shown as 'Corner Cut-Off Area' in the following Corner Cut-Off Area 4.5M Road Reserve Road Road Reserve Road Road Reserve Road Road Reserve Road Road Road Road Road Road Road Road		
PO 5.4 Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the demands on driver concentration are high.	DTS/DPF 5.4 Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.		
PO 5.5 Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	DTS/DPF 5.5 Where the advertisement or advertising hoarding is: (a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal: (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.		
P0 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).		

Animal Keeping and Horse Keeping

Assessment Provisions (AP)

	Desired Outcome
DO 1	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting at	nd Design
P01.1	DTS/DPF 1.1
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.
P01.2	DTS/DPF 1.2
Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.
Horse Keeping	
P0 2.1	DTS/DPF 2.1
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	None are applicable.

Page 23 of 102 Printed on 3/02/2022

	1	
P0 2.2	DTS/DPF 2.2	
Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other	
	ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.	
PO 2.3	DTS/DPF 2.3	
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.	
PO 2.4	DTS/DPF 2.4	
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.	
PO 2.5	DTS/DPF 2.5	
Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).	
Kei	nnels	
PO 3.1	DTS/DPF 3.1	
Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	The floors of kennels satisfy all of the following:	
	are constructed of impervious concrete b are designed to be self-draining when washed down.	
P0 3.2	DTS/DPF 3.2	
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as:	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.	
adopting appropriate separation distances orientating openings away from sensitive receivers.		
PO 3.3	DTS/DPF 3.3	
Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.	
Wa	astes	
PO 4.1	DTS/DPF 4.1	
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.	
PO 4.2	DTS/DPF 4.2	
Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.	Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.	

Aquaculture

Assessment Provisions (AP)

Desired Outcome	
DO 1	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land-based Aquaculture		
P0 1.1	DTS/DPF 1.1	
Land-based aquaculture and associated components are sited and designed to mitigate	Land-based aquaculture and associated components are located to satisfy all of the	

Page 24 of 102 Printed on 3/02/2022

Policy24 - Enquiry	
adverse impacts on nearby sensitive receivers.	following: (a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to accommodate
	sensitive receivers.
P0 1.2	DTS/DPF 1.2
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.
P0 1.3	DTS/DPF 1.3
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	None are applicable.
PO 1.4	DTS/DPF 1.4
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	None are applicable.
PO 1.5	DTS/DPF 1.5
Land-based aquaculture and associated components, including intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	None are applicable.
PO 1.6	DTS/DPF 1.6
Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission.	None are applicable.
PO 1.7	DTS/DPF 1.7
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment.	None are applicable.
Marine Base	rd Aquaculture
P0 2.1	DTS/DPF 2.1
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including: (a) creeks and estuaries	None are applicable.
(b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems.	
PO 2.2	DTS/DPF 2.2
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	None are applicable.
P0 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
P0 2.4	DTS/DPF 2.4
Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate distance seaward of the high water mark.	Marine aquaculture development is located 100m or more seaward of the high water mark.
PO 2.5	DTS/DPF 2.5
Marine aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
areas of high public use areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports areas of outstanding visual or environmental value areas of high tourism value areas of important regional or state economic activity, including commercial ports, wharfs and jetties the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.	
P0 2.6	DTS/DPF 2.6
Marine aquaculture is sited and designed to minimise interference and obstruction to the natural processes of the coastal and marine environment.	None are applicable.
P0 2.7	DTS/DPF 2.7
Marine aquaculture is designed to be as unobtrusive as practicable by incorporating	None are applicable.

Page 25 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Policy24 - Enquiry				
measure	measures such as:			
(a) (b) (c)	using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water positioning structures to protrude the minimum distance practicable above the surface of the water avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons			
(d)	positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.			
PO 2.8		DTS/DPF 2.8		
I	launching and maintenance facilities utilise existing established roads, tracks, and paths to or from the sea where possible to minimise environmental and amenity is.	None are applicable.		
PO 2.9		DTS/DPF 2.9		
	launching and maintenance facilities are developed as common user facilities and ocated where practicable to mitigate adverse impacts on coastal areas.	None are applicable.		
PO 2.10		DTS/DPF 2.10		
	aquaculture is sited to minimise potential impacts on, and to protect the integrity of, s under the <i>National Parks and Wildlife Act 1972</i> .	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act 1972</i> .		
PO 2.11		DTS/DPF 2.11		
Onshore amenity	e storage, cooling and processing facilities do not impair the coastline and its visual by:	None are applicable.		
(a)	being sited, designed, landscaped and of a scale to reduce the overall bulk and			
(b)	appearance of buildings and complement the coastal landscape making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access arrangements as far as practicable			
(c)	incorporating appropriate waste treatment and disposal.			
	Navigation	and Safety		
P03.1		DTS/DPF 3.1		
Marine a	aquaculture sites are suitably marked to maintain navigational safety.	None are applicable.		
PO 3.2		DTS/DPF 3.2		
Marine aquaculture is sited to provide adequate separation between farms for safe navigation.		None are applicable.		
Environmenta		l Management		
PO 4.1		DTS/DPF 4.1		
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.		None are applicable.		
PO 4.2		DTS/DPF 4.2		
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.		None are applicable.		
PO 4.3		DTS/DPF 4.3		
I	aquaculture provides for progressive or future reclamation of disturbed areas f, or upon, decommissioning.	None are applicable.		
PO 4.4		DTS/DPF 4.4		
disused	Iture operations incorporate measures for the removal and disposal of litter, material, shells, debris, detritus, dead animals and animal waste to prevent of waters, wetlands, or the nearby coastline.	None are applicable.		
L				

Beverage Production in Rural Areas

Assessment Provisions (AP)

Desired Outcome		
C	00 1	Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.

Page 26 of 102 Printed on 3/02/2022

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Odour	and Noise	
PO 1.1	DTS/DPF 1.1	
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.	
P01.4	DTS/DPF 1.4	
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.	
PO 1.5	DTS/DPF 1.5	
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.	
Water	r Quality	
P0 2.1	DTS/DPF 2.1	
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.	
PO 2.2	DTS/DPF 2.2	
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	None are applicable.	
PO 2.3	DTS/DPF 2.3	
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.	
P0 2.4	DTS/DPF 2.4	
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.	
Wastewa	ter Irrigation	
P0 3.1	DTS/DPF 3.1	
Beverage production wastewater irrigation systems are designed and located to not contaminate soil and surface and ground water resources or damage crops.	None are applicable.	
PO 3.2	DTS/DPF 3.2	
Beverage production wastewater irrigation systems are designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.	
PO 3.3	DTS/DPF 3.3	
Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as:	None are applicable.	
(a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore (c) land subject to flooding (d) steeply sloping land (e) rocky or highly permeable soil overlaying an unconfined aquifer.		

Bulk Handling and Storage Facilities

Page 27 of 102 Printed on 3/02/2022

Assessment Provisions (AP)

Desired Outcome	
DO 1	Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Po 1.1	DTS/DPF 1.1	
Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers.	Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers: (a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility (b) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility (c) bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more (d) coal handling with: a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more.	
Buffers and	Buffers and Landscaping	
PO 2.1 Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares.	DTS/DPF 2.1 None are applicable.	
P0 2.2	DTS/DPF 2.2	
Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.	None are applicable.	
Access and Parking		
PO 3.1 Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.	DTS/DPF 3.1 Roadways and vehicle parking areas are sealed with an all-weather surface.	
Slipways, Whan	/es and Pontoons	
PO 4.1 Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.	DTS/DPF 4.1 None are applicable.	

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome	
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Page 28 of 102 Printed on 3/02/2022

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Po 1.1 Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	DTS/DPF 1.1 One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act 1996</i> (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

I	Desired Outcome		
	DO 1	Develo	opment is:
		(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area
		(b)	durable - fit for purpose, adaptable and long lasting
		(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors
		(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
All dev	elopment	
External Appearance		
PO 1.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Plant, exhaust and intake vents and other technical equipment is integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.	
positioning plant and equipment in unobtrusive locations viewed from public roads and spaces screening rooftop plant and equipment from view		
 screening rooftop plant and equipment from view when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses. 		
P0 1.5	DTS/DPF 1.5	
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone.	None are applicable.	
Safety		
P021	DTS/DPF 2.1	
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable	None are applicable.	

Page 29 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Policy24 - Enquiry	
screening wherever practicable.	
P0 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
P0 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
P0 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
P0 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	scaping
P0 3.1	DTS/DPF 3.1
Soft landscaping and tree planting is incorporated to:	None are applicable.
(a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes (e) contribute to biodiversity.	
P0 3.2	DTS/DPF 3.2
Soft landscaping and tree planting maximises the use of locally indigenous plant species, incorporates plant species best suited to current and future climate conditions and avoids pest plant and weed species.	None are applicable.
Environment	al Performance
P0 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
PO 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate-responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.
Water Sen	sitive Design
P0 5.1	DTS/DPF 5.1
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.
 the quantity and quality of surface water and groundwater the depth and directional flow of surface water and groundwater the quality and function of natural springs. 	
On-site Waste T	reatment Systems
P0 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	Effluent disposal drainage areas do not: (a) encroach within an area used as private open space or result in less private open space than that specified in Design Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements in Designated Areas.
Carparking	Appearance
P07.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-	None are applicable.
poverophient racing the success designed to minimise the negative impacts of any semi-	rione are applicable.

Page 30 of 102 Printed on 3/02/2022

Policy24 - Enquiry

basement and undercroft car parking on the streetscapes through techniques such as:		
(a) limiting protrusion above finished ground level		
(b) screening through appropriate planting, fencing and mounding		
(c) limiting the width of openings and integrating them into the building structure.		
P0 7.2	DTS/DPF 7.2	
Vehicle parking areas are appropriately located, designed and constructed to minimise	None are applicable.	
impacts on adjacent sensitive receivers through measures such as ensuring they are	Trone are approache.	
attractively developed and landscaped, screen fenced and the like.		
P0 7.3	DTS/DPF 7.3	
Safe, legible, direct and accessible pedestrian connections are provided between parking	None are applicable.	
areas and the development.		
·		
P0 7.4	DTS/DPF 7.4	
Street level vehicle parking areas incorporate tree planting to provide shade and reduce	None are applicable.	
solar heat absorption and reflection.		
P0 7.5	DTS/DPF 7.5	
Street level parking areas incorporate soft landscaping to improve visual appearance when	None are applicable.	
viewed from within the site and from public places.		
· ·		
P0 7.6	DTS/DPF 7.6	
Vehicle parking areas and associated driveways are landscaped to provide shade and	None are applicable.	
positively contribute to amenity.	Note are applicable.	
, , , , , , , , , , , , , , , , , , ,		
P0 7.7	DTS/DPF 7.7	
Vehicle parking areas and access ways incorporate integrated stormwater management	None are applicable.	
techniques such as permeable or porous surfaces, infiltration systems, drainage swales or	Note are applicable.	
rain gardens that integrate with soft landscaping.		
3 · · · · · · · · · · · · · · · · · · ·		
Earthworks a	nd sloping land	
P0 8.1	DTS/DPF 8.1	
	David and the second days and investigation of the fall actions.	
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following:	
Tor curtimorks to minit disturbance to natural topography.	(a) excavation exceeding a vertical height of 1m	
	(b) filling exceeding a vertical height of 1m	
	(c) a total combined excavation and filling vertical height of 2m or more.	
PO 8.2	DTS/DPF 8.2	
PU 6.2	U15/UPT 6.2	
Driveways and access tracks are designed and constructed to allow safe and convenient	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a)	
access on sloping land (with a gradient exceeding 1 in 8).	and (b):	
	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway	
	(b) are constructed with an all-weather trafficable surface.	
	are constructed with an an weather transcapic surface.	
P0 8.3	DTS/DPF 8.3	
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.	
(a) do not contribute to the instability of embankments and cuttings		
(b) provide level transition areas for the safe movement of people and goods to and		
from the development		
(c) are designed to integrate with the natural topography of the land.		
P0 8.4	DTS/DPF 8.4	
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of	None are applicable.	
natural drainage lines and includes on-site drainage systems to minimise erosion.		
PO 8.5	DTS/DPF 8.5	
Development does not occur on land at risk of landslip nor increases the potential for	None are applicable.	
landslip or land surface instability.		
·		
Fences	and Walls	
PO 9.1	DTS/DPF 9.1	
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight	None are applicable.	
or the amenity of public places.		
To the amonity of public places.		
PO 9.2	DTS/DPF 9.2	
Landscaping incorporated on the low side of retaining walls is visible from public roads and	A vegetated randscaped strip in i wide or more is provided against the low side of a	

Page 31 of 102 Printed on 3/02/2022

Policy24 - Eriquity	
public open space to minimise visual impacts.	retaining wall.
Overlooking / Visual Privacy	r (in building 3 storeys or less)
P0 10.1	DTS/DPF 10.1
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with a residential allotment/site satisfy one of the following:
	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm
	(b) have sill heights greater than or equal to 1.5m above finished floor level
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses.	One of the following is satisfied:
Tooms and private open space of adjoining residential uses.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace
	or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
	 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or
	(ii) 1.7m above finished floor level in all other cases
All Residentie	I al development
Front elevations and	d passive surveillance
P0 11.1	DTS/DPF 11.1
Dwellings incorporate windows along primary street frontages to encourage passive	Each dwelling with a frontage to a public street:
surveillance and make a positive contribution to the streetscape.	(a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m
	(b) has an aggregate window area of at least 2m ² facing the primary street.
P0 11.2	DTS/DPF 11.2
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.
Outlook a	nd amenity
P0 12.1	DTS/DPF 12.1
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an outlook towards the street frontage or private open space, public open space, or waterfront areas.
PO 12.2	DTS/DPF 12.2
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.
	evelopment
PO 13.1	DTS/DPF 13.1
Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.	Ancillary buildings: (a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m2
	(c) are not constructed, added to or altered so that any part is situated: (i) in front of any part of the building line of the dwelling to which it is ancillary or
	(ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
	(d) in the case of a garage or carport, the garage or carport: (i) is set back at least 5.5m from the boundary of the primary street (ii) when facing a primary street or secondary street, has a total door / opening not exceeding: A. for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser B. for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width
	(e) if situated on a boundary (not being a boundary with a primary street or secondary

Page 32 of 102 Printed on 3/02/2022

street), do not exceed a length of 11.5m unless: a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure have a wall height or post height not exceeding 3m above natural ground level (i) have a roof height where no part of the roof is more than 5m above the natural ground level if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is a total area as determined by the following table: Minimum percentage Dwelling site area (or in the case of residential flat building or group dwelling(s), average site of site area) (m²) <150 10% 150-200 15% 201-450 20% >450 25% the amount of existing soft landscaping prior to the development occurring PO 13.2 DTS/DPF 13.2 Ancillary buildings and structures do not result in: Ancillary buildings and structures do not impede on-site functional requirements such as (a) less private open space than specified in Design in Urban Areas Table 1 - Private private open space provision or car parking requirements and do not result in over-Open Space development of the site. less on-site car parking than specified in Transport, Access and Parking Table 1 -General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. PO 13.3 DTS/DPF 13.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming The pump and/or filtration system is ancillary to a dwelling erected on the same site and is: pool or spa is positioned and/or housed to not cause unreasonable noise nuisance to enclosed in a solid acoustic structure that is located at least 5m from the nearest adjacent sensitive receivers habitable room located on an adjoining allotment (b) located at least 12m from the nearest habitable room located on an adjoining allotment. Garage appearance Garaging is designed to not detract from the streetscape or appearance of a dwelling. Garages and carports facing a street: are situated so that no part of the garage or carport is in front of any part of the building line of the dwelling are set back at least 5.5m from the boundary of the primary street (c) have a garage door / opening not exceeding 7m in width have a garage door /opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street. DTS/DPF 15.1 PO 15.1 The visual mass of larger buildings is reduced when viewed from adjoining allotments or None are applicable public streets Dwelling additions PO 16.1 DTS / DPF 16.1 Dwelling additions are sited and designed to not detract from the streetscape or amenity Dwelling additions: of adjoining properties and do not impede on-site functional requirements. are not constructed, added to or altered so that any part is situated closer to a public street

Page 33 of 102 Printed on 3/02/2022

Policy24 - Enquiry do not result in: (i) excavation exceeding a vertical height of 1m (ii) filling exceeding a vertical height of 1m (iii) a total combined excavation and filling vertical height of 2m or more less Private Open Space than specified in Design Table 1 - Private Open Space (v) less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas upper level windows facing side or rear boundaries unless: they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than have sill heights greater than or equal to 1.5m above finished floor level or C. incorporate screening to a height of 1.5m above finished floor (vii) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land 1.7m above finished floor level in all other cases. Private Open Space Dwellings are provided with suitable sized areas of usable private open space to meet the Private open space is provided in accordance with Design Table 1 - Private Open Space. needs of occupants. Water Sensitive Design DTS/DPF 18.1 Residential development creating a common driveway / access includes stormwater Residential development creating a common driveway / access that services 5 or more management systems that minimise the discharge of sediment, suspended solids, organic dwellings achieves the following stormwater runoff outcomes: matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. 80 per cent reduction in average annual total suspended solids (b) 60 per cent reduction in average annual total phosphorus (c) 45 per cent reduction in average annual total nitrogen. PO 18.2 DTS/DPF 18.2 Residential development creating a common driveway / access includes a stormwater Development creating a common driveway / access that services 5 or more dwellings: management system designed to mitigate peak flows and manage the rate and duration of maintains the pre-development peak flow rate from the site based upon a 0.35 stormwater discharges from the site to ensure that the development does not increase the runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff peak flows in downstream systems. time to peak is not increased or captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings. Car parking, access and manoeuvrability PO 19.1 DTS/DPF 19.1 Enclosed parking spaces are of a size and dimensions to be functional, accessible and Residential car parking spaces enclosed by fencing, walls or other structures have the convenient. following internal dimensions (separate from any waste storage area): single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m a minimum garage door width of 2.4m (iii) (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m minimum garage door width of 2.4m per space. PO 19.2 DTS/DPF 19.2 Uncovered parking spaces are of a size and dimensions to be functional, accessible and Uncovered car parking spaces have:

Page 34 of 102 Printed on 3/02/2022

(b)

a minimum length of 5.4m

a minimum width of 2.4m

convenient.

	(c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m
PO 19.3	DTS/DPF 19.3
Driveways are located and designed to facilitate safe access and egress while maximising	Driveways and access points on sites with a frontage to a public road of 10m or less have a
land available for street tree planting, landscaped street frontages, domestic waste collection and on-street parking.	width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.
PO 19.4	DTS/DPF 19.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads	Vehicle access to designated car parking spaces satisfy (a) or (b):
and does not interfere with street infrastructure or street trees.	(a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land
	(b) where newly proposed:
	(b) where newly proposed: (i) is set back 6m or more from the tangent point of an intersection of 2 or
	more roads (ii) is set back outside of the marked lines or infrastructure dedicating a
	pedestrian crossing
	(iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services.
PO 19.5	DTS/DPF 19.5
Driveways are designed to enable safe and convenient vehicle movements from the public	Driveways are designed and sited so that:
road to on-site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average
	(b) they are aligned relative to the street boundary so that there is no more than a 20
	degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space)
	and the street boundary (c) if located to provide access from an alley, lane or right of way - the alley, land or
	right or way is at least 6.2m wide along the boundary of the allotment / site
P0 19.6	DTS/DPF 19.6
Driveways and access points are designed and distributed to optimise the provision of on-	Where on-street parking is available abutting the site's street frontage, on-street parking is
street visitor parking.	retained in accordance with the following requirements:
	(a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest
	whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
	other parking opaces or to air the obstaction where the parking to indented.
	storage
P0 20.1	DTS/DPF 20.1
Provision is made for the adequate and convenient storage of waste bins in a location screened from public view.	None are applicable.
Design of Transp	portable Dwellings
P0 21.1	DTS/DPF 21.1
The sub-floor space beneath transportable buildings is enclosed to give the appearance of a permanent structure.	Buildings satisfy (a) or (b):
	(a) are not transportable or
	(b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building.
	ildings and battle-axe development
PO 22.1	DTS/DPF 22.1
Dwellings are of a suitable size to accommodate a layout that is well organised and	Dwellings have a minimum internal floor area in accordance with the following table:
provides a high standard of amenity for occupants.	
	Number of bedrooms Minimum internal floor area
	Studio 35m ²
	1 bedroom 50m ²
	2 bedroom 65m ²
	3+ bedrooms 80m ² and any dwelling over 3 bedrooms

Page 35 of 102 Printed on 3/02/2022

1 olioyza zniguny	
	provides an additional 15m ² for every additional bedroom
PO 22.2	DTS/DPF 22.2
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.
PO 22.3	DTS/DPF 22.3
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.
P0 22.4	DTS/DPF 22.4
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	Dwelling sites/allotments are not in the form of a battle-axe arrangement.
Communal	Open Space
P0 23.1	DTS/DPF 23.1
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 23.2	DTS/DPF 23.2
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 23.3	DTS/DPF 23.3
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 23.4	DTS/DPF 23.4
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 23.5	DTS/DPF 23.5
Communal open space is designed and sited to:	None are applicable.
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Carparking, access	and manoeuvrability
P0 24.1	DTS/DPF 24.1
Driveways and access points are designed and distributed to optimise the provision of onstreet visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	(a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 24.2	DTS/DPF 24.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
P0 24.3	DTS/DPF 24.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of
	the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 24.4	DTS/DPF 24.4
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.
PO 24.5	DTS/DPF 24.5

Page 36 of 102 Printed on 3/02/2022

Policy24 - Enquiry	
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
P0 24.6	DTS/DPF 24.6
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Soft Lan	dscaping
PO 25.1	DTS/DPF 25.1
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.
PO 25.2	DTS/DPF 25.2
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Site Facilities /	Waste Storage
P0 26.1	DTS/DPF 26.1
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
P0 26.2	DTS/DPF 26.2
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 26.3	DTS/DPF 26.3
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.
(a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point.	
PO 26.4	DTS/DPF 26.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 26.5	DTS/DPF 26.5
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.
PO 26.6	DTS/DPF 26.6
Services including gas and water meters are conveniently located and screened from public view.	
Supported accommodati	on and retirement facilities
Siting and C	onfiguration
P0 27.1	DTS/DPF 27.1
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
	and Access
PO 28.1	DTS/DPF 28.1
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.
ground-level access or lifted access to all units level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places car parks with gradients no steeper than 1-in-40 and of sufficient area to provide for wheelchair manoeuvrability kerb ramps at pedestrian crossing points.	
Communal	Open Space
PO 29.1	DTS/DPF 29.1
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.

Page 37 of 102 Printed on 3/02/2022

Policy24 - Eriquity		
PO 29.2	DTS/DPF 29.2	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.	
PO 29.3	DTS/DPF 29.3	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.	
PO 29.4	DTS/DPF 29.4	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.		
PO 29.5	DTS/DPF 29.5	
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.	
PO 29.6	DTS/DPF 29.6	
Communal open space is designed and sited to:	None are applicable.	
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.		
	/ Waste Storage	
PO 30.1 Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles.	DTS/DPF 30.1 None are applicable.	
PO 30.2	DTS/DPF 30.2	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 30.3	DTS/DPF 28.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 30.4	DTS/DPF 30.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located and screened from public view.	None are applicable.	
PO 30.5	DTS/DPF 30.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 30.6	DTS/DPF 30.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
PO 30.7	DTS/DPF 30.7	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
All non-residential development		
Water Sen:	sitive Design	
PO 31.1	DTS/DPF 31.1	
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	
P0 31.2	DTS/DPF 31.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.	
Wash-down and Waste	Loading and Unloading	
PO 32.1	DTS/DPF 32.1	
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, vessels, plant or equipment are:	None are applicable.	
I and the second		

Page 38 of 102 Printed on 3/02/2022

Policy24 - Enquiry

- (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off
- (b) paved with an impervious material to facilitate wastewater collection
- of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area
- (d) designed to drain wastewater to either:
 - a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme
 - $\mbox{(ii)} \hspace{0.5cm} \mbox{a holding tank and its subsequent removal off-site on a regular basis.}$

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): $4m^2$ with a minimum dimension 1.8m One bedroom: $8m^2$ with a minimum dimension 2.1m Two bedroom dwelling: $11m^2$ with a minimum dimension 2.4m Three + bedroom dwelling: $15m^2$ with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Design in Urban Areas

Assessment Provisions (AP)

Desired Outcome		
DO 1	Development is:	
	 (a) contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality (b) durable - fit for purpose, adaptable and long lasting (c) inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors (d) sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption. 	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
All Development		
External Appearance		
P01.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.	
P01.3	DTS/DPF 1.3	
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the	None are applicable.	

Page 39 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Policy24 - Eriquity	
streetscape.	
PO 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.
positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces screening rooftop plant and equipment from view when located on the roof of non-residential development, locating the plant and	
equipment as far as practicable from adjacent sensitive land uses.	
PO 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone.	None are applicable.
Se	fety
P0 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.
P0 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	ccaping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting are incorporated to:	None are applicable.
(a) minimise heat absorption and reflection (b) maximise shade and shelter	
(c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes.	
Environment	al Performance
P0 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
P0 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.
Water Sen	sitive Design
PO 5.1	DTS/DPF 5.1
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.
(a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs.	

Page 40 of 102 Printed on 3/02/2022

On-site Waste T	reatment Systems
P0 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could	Effluent disposal drainage areas do not:
be reasonably foreseen to be used for, private open space, driveways or car parking.	
	(a) encroach within an area used as private open space or result in less private open
	space than that specified in Design in Urban Areas Table 1 - Private Open Space
	(b) use an area also used as a driveway
	(c) encroach within an area used for on-site car parking or result in less on-site car
	parking than that specified in Transport, Access and Parking Table 1 - General Off-
	Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements
	in Designated Areas.
	in bedghated / wedo.
On a solida	
Car parking	g appearance
P0 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-	
basement and undercroft car parking on streetscapes through techniques such as:	None are applicable.
(a) limiting protrusion above finished ground level	
1 / Control of the co	
(c) limiting the width of openings and integrating them into the building structure.	
P0 7.2	DTS/DPF 7.2
Landa de la companya	N. P. II
Vehicle parking areas appropriately located, designed and constructed to minimise	None are applicable.
impacts on adjacent sensitive receivers through measures such as ensuring they are	
attractively developed and landscaped, screen fenced and the like.	
P0 7.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking	None are applicable.
areas and the development.	
PO 7.4	DTS/DPF 7.4
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces
heat absorption and reflection.	include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking
	spaces provided and a landscaped strip on any road frontage of a minimum dimension of
	1m.
P0 7.5	DTS/DPF 7.5
107.0	15/5/177.5
Street level parking areas incorporate soft landscaping to improve visual appearance when	Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping
viewed from within the site and from public places.	with a minimum dimension of:
	(a) 1m along all public road frontages and allotment boundaries
	(b) 1m between double rows of car parking spaces.
	(%) This between double rows of car parking spaces.
P0 7.6	DTS/DPF 7.6
I .	
Vehicle parking areas and associated driveways are landscaped to provide shade and	None are applicable
Vehicle parking areas and associated driveways are landscaped to provide shade and	None are applicable.
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
positively contribute to amenity.	
	None are applicable. DTS/DPF 7.7
positively contribute to amenity. PO 7.7	DTS/DPF 7.7
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management	
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or	DTS/DPF 7.7
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management	DTS/DPF 7.7
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	DTS/DPF 7.7 None are applicable.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	DTS/DPF 7.7
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a	DTS/DPF 7.7 None are applicable. nd sloping land
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	DTS/DPF 7.7 None are applicable.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a	DTS/DPF 7.7 None are applicable. nd sloping land
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a	DTS/DPF 7.7 None are applicable. nd sloping land DTS/DPF 8.1
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need	DTS/DPF 7.7 None are applicable. nd sloping land DTS/DPF 8.1
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need	DTS/DPF 7.7 None are applicable. and sloping land DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need	DTS/DPF 7.7 None are applicable. and sloping land DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a)
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. P0 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a P0 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. P0 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. P0 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks a PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and	DTS/DPF 7.7 None are applicable. DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.

Page 41 of 102 Printed on 3/02/2022

1 Siloy24 Enquiry	<u> </u>
P0 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on site drainage systems to minimise erosion.	None are applicable.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip or increase the potential for landslip or land surface instability.	None are applicable.
Fences	and walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping is incorporated on the low side of retaining walls that are visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual Pri	vacy (low rise buildings)
PO 10.1	DTS/DPF 10.1
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses in neighbourhood-type zones.	Upper level windows facing side or rear boundaries shared with a residential use in a neighbourhood-type zone: (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies to habitable rooms and private open space of adjoining residential uses in neighbourhood type zones.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases
Site Facilities / Waste Storage (exclu	ling low rise residential development)
PO 11.1	DTS/DPF 11.1
Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	None are applicable.
P0 11.2	DTS/DPF 11.2
Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	None are applicable.
PO 11.3 Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	DTS/DPF 11.3 None are applicable.
P0 11.4 Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing.	DTS/DPF 11.4 None are applicable.
PO 11.5	DTS/DPF 11.5
For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate.	None are applicable.
All Development - M	edium and High Rise
External A	ppearance
P0 12.1	DTS/DPF 12.1
Buildings positively contribute to the character of the local area by responding to local context.	None are applicable.
P0 12.2	DTS/DPF12.2
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.
1	

Page 42 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Policy24 - Enquiry				
PO 12.3	DTS/DPF 12.3			
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.			
P012.4	DTS/DPF 12.4			
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.			
PO 12.5	DTS/DPF 12.5			
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	(a) masonry (b) natural stone	bination of the followin		
P0 12.6	DTS/DPF 12.6			
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	(b) prominent ent (c) habitable root (d) areas of comi	ges incorporate: uch as shops or offices try areas for multi-store ms of dwellings munal public realm with or subzone provisions.	ey buildings (where it	
PO 12.7	DTS/DPF 12.7			
Entrances to multi-storey buildings are safe, attractive, welcoming, functional and contribute to streetscape character.	(c) designed to b active or occu (d) designed to p around the en (e) located as clo need for long	ords the street and easily identifiable to the prominent, accentuate upied ground floor uses rovide shelter, a sense	ed and a welcoming to of personal address a e lift and / or lobby ac	feature if there are no and transitional space access to minimise the
PO 12.8	DTS/DPF 12.8			
Building services, plant and mechanical equipment are screened from the public realm.	None are applicable.			
	scaping			
Po 13.1 Development facing a street provides a well landscaped area that contains a deep soil space to accommodate a tree of a species and size adequate to provide shade, contribute to tree canopy targets and soften the appearance of buildings.				ng that accommodates a property boundaries is
PO 13.2	DTS/DPF 13.2			
Deep soil zones are provided to retain existing vegetation or provide areas that can accommodate new deep root vegetation, including tall trees with large canopies to provide shade and soften the appearance of multi-storey buildings.	Multi-storey development provides deep soil zones and incorporates trees at not less than the following rates, except in a location or zone where full site coverage is desired.			
	Site area	Minimum deep soil area	Minimum dimension	Tree / deep soil zones
	<300 m ²	10 m ²	1.5m	1 small tree / 10 m ²
	300-1500 m ²	7% site area	3m	1 medium tree / 30 m ²
	>1500 m ²	7% site area	6m	1 large or medium tree / 60 m ²
	II.	ea definitions		
	Tree size and site are			
	Small tree	4-6m mature height a	nd 2-4m canopy spre	ad
		4-6m mature height a		
	Small tree		and 4-8m canopy spi	read
	Small tree Medium tree	6-12m mature height 12m mature height ar	and 4-8m canopy spi	read

Page 43 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
P0 13.3	DTS/DPF 13.3	
Deep soil zones with access to natural light are provided to assist in maintaining vegetation health.	None are applicable.	
PO 13.4	DTS/DPF 13.4	
Unless separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height.	Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated.	
Enviro	nmental	
P0 14.1	DTS/DPF 14.1	
Development minimises detrimental micro-climatic impacts on adjacent land and buildings.	None are applicable.	
PO 14.2	DTS/DPF 14.2	
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.	None are applicable.	
PO 14.3	DTS/DPF 14.3	
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as:	None are applicable.	
a podium at the base of a tall tower and aligned with the street to deflect wind away from the street substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas the placement of buildings and use of setbacks to deflect the wind at ground level avoiding tall shear elevations that create windy conditions at street level.		
,		
	arking	
PO 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages	DTS/DPF15.1 Multi-level vehicle parking structures within buildings:	
and complement neighbouring buildings.	provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings.	
PO 15.2	DTS/DPF 15.2	
Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.	None are applicable.	
Overlooking/	Visual Privacy	
PO 16.1	DTS/DPF 16.1	
Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as:	None are applicable.	
appropriate site layout and building orientation off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight building setbacks from boundaries (including building boundary to boundary		
where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms (d) screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity.		
All residentia	development	
Front elevations and	passive surveillance	
P0 17.1 Dwellings incorporate windows facing primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	DTS/DPF 17.1 Each dwelling with a frontage to a public street:	
	(a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street.	
P0 17.2	DTS/DPF 17.2	
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.	

Page 44 of 102 Printed on 3/02/2022

Policy24 - Enquiry				
Outlook a	nd Amenity			
PO 18.1	DTS/DPF 18.1			
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an external outlook of the street frontage, private open space, public open space, or waterfront areas.			
P0 18.2	DTS/DPF 18.2			
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.			
Ancillary D	evelopment			
P0 19.1	DTS/DPF 19.1			
Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.	Ancillary buildings: (a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m2 (c) are not constructed, added to or altered so that any part is situated:			
	 in front of any part of the building line of the dwelling to which it is ancillary or 			
	(ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)			
	(d) in the case of a garage or carport, the garage or carport: (i) is set back at least 5.5m from the boundary of the primary street (ii) when facing a primary street or secondary street, has a total door / opening not exceeding: A. for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser B. for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width			
	(e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless: (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent			
	(f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure (h) have a wall height or post height not exceeding 3m above natural ground level (i) have a roof height where no part of the roof is more than 5m above the natural ground level (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less: (i) a total area as determined by the following table:			
	Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m²) <150 10% 150-200 15%			
	150-200 15% 201-450 20%			
	>450 25%			
	(ii) the amount of existing soft landscaping prior to the development occurring.			
P0 19.2 Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.	DTS/DPF 19.2 Ancillary buildings and structures do not result in: (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.			

Page 45 of 102 Printed on 3/02/2022

PO 19.3 DTS/DPF 19.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming The pump and/or filtration system is ancillary to a dwelling erected on the same site and is: pool or spa positioned and/or housed to not cause unreasonable noise nuisance to enclosed in a solid acoustic structure that is located at least 5m from the nearest adjacent sensitive receivers habitable room located on an adjoining allotment located at least 12m from the nearest habitable room located on an adjoining Residential Development - Low Rise External appearance PO 20.1 DTS/DPF 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Garages and carports facing a street: are situated so that no part of the garage or carport will be in front of any part of the building line of the dwelling (b) are set back at least 5.5m from the boundary of the primary street have a garage door / opening width not exceeding 7m (d) have a garage door / opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same PO 20.2 DTS/DPF 20.2 Dwelling elevations facing public streets and common driveways make a positive Each dwelling includes at least 3 of the following design features within the building contribution to the streetscape and the appearance of common driveway areas. elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway: a minimum of 30% of the building wall is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building wall a balcony projects from the building wall (d) a verandah projects at least 1m from the building wall (e) eaves of a minimum 400mm width extend along the width of the front elevation a minimum 30% of the width of the upper level projects forward from the lower $\,$ level primary building line by at least 300mm (q) a minimum of two different materials or finishes are incorporated on the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish. PO 20.3 DTS/DPF 20.3 The visual mass of larger buildings is reduced when viewed from adjoining allotments or None are applicable public streets. Private Open Space PO 21.1 DTS/DPF 21.1 Dwellings are provided with suitable sized areas of usable private open space to meet the Private open space is provided in accordance with Design in Urban Areas Table 1 - Private needs of occupants Open Space. PO 21 2 DTS/DPF 21.2 Private open space is positioned to provide convenient access from internal living areas. Private open space is directly accessible from a habitable room. Landscaping PO 22.1 DTS/DPF 22.1 Soft landscaping is incorporated into development to: Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b): (a) minimise heat absorption and reflection a total area as determined by the following table: (b) contribute shade and shelter (c) provide for stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes. Dwelling site area (or in the case of residential flat Minimum percentage of building or group dwelling(s), average site area) (m²) site <150 10% 150-200 15%

Page 46 of 102 Printed on 3/02/2022

>200-450

20%

>450 25% (b) at least 30% of any land between the primary street boundary and the primary building line Car parking, access and manoeuvrability PO 23.1 DTS/DPF 23.1 Residential car parking spaces enclosed by fencing, walls or other structures have the Enclosed car parking spaces are of dimensions to be functional, accessible and convenient. following internal dimensions (separate from any waste storage area): single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3 0m (iii) a minimum garage door width of 2.4m double width car parking spaces (side by side): a minimum length of 5.4m (ii) a minimum width of 5.4m minimum garage door width of 2.4m per space. PO 23.2 DTS/DPF 23.2 Uncovered car parking spaces have: Uncovered car parking space are of dimensions to be functional, accessible and convenient a minimum length of 5.4m a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m. PO 23 3 DTS/DPF 23.3 Driveways and access points are located and designed to facilitate safe access and egress Driveways and access points satisfy (a) or (b): while maximising land available for street tree planting, domestic waste collection, sites with a frontage to a public road of 10m or less, have a width between 3.0 and landscaped street frontages and on-street parking 3.2 metres measured at the property boundary and are the only access point provided on the site sites with a frontage to a public road greater than 10m: have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m. PO 23.4 DTS/DPF 23.4 Vehicle access is safe, convenient, minimises interruption to the operation of public roads Vehicle access to designated car parking spaces satisfy (a) or (b): and does not interfere with street infrastructure or street trees. is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land where newly proposed, is set back: 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing. PO 23.5 DTS/DPF 23.5 Driveways are designed to enable safe and convenient vehicle movements from the public Driveways are designed and sited so that: road to on-site parking spaces. the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site PO 23 6 DTS/DPF 23 6 Driveways and access points are designed and distributed to optimise the provision of on-Where on-street parking is available abutting the site's street frontage, on-street parking is street visitor parking retained in accordance with the following requirements: minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) minimum car park length of 5.4m where a vehicle can enter or exit a space directly

Page 47 of 102 Printed on 3/02/2022

	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
Waste	storage
PO 24.1	DTS/DPF 24.1
Provision is made for the convenient storage of waste bins in a location screened from public view.	Where dwellings abut both side boundaries a waste bin storage area is provided behind the building line of each dwelling that:
	has a minimum area of 2m ² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.
Design of Trans	portable Buildings
PO 25.1	DTS/DPF 25.1
The sub-floor space beneath transportable buildings is enclosed to give the appearance of a permanent structure.	Buildings satisfy (a) or (b):
a permanent sudeture.	(a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building.
Residential Development - Medium and I	High Rise (including serviced apartments)
Outlook and	Visual Privacy
P0 26.1	DTS/DPF 26.1
Ground level dwellings have a satisfactory short range visual outlook to public, communal	Buildings:
or private open space.	Sundings.
	(a) provide a habitable room at ground or first level with a window facing toward the street
	(b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage.
PO 26.2	DTS/DPF 26.2
The visual privacy of ground level dwellings within multi-level buildings is protected.	The finished floor level of ground level dwellings in multi-storey developments is raised by up to 1.2m.
Private 0	pen Space
P0 27.1	DTS/DPF 27.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
Residential amenity i	n multi-level buildings
PO 28.1	DTS/DPF 28.1
Residential accommodation within multi-level buildings have habitable rooms, windows and balconies designed and positioned to be separated from those of other dwellings and accommodation to provide visual and acoustic privacy and allow for natural ventilation and the infiltration of daylight into interior and outdoor spaces.	Habitable rooms and balconies of independent dwellings and accommodation are separated by at least 6m from one another where there is a direct line of sight between them and 3m or more from a side or rear property boundary.
PO 28.2	DTS/DPF 28.2
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to:	Balconies utilise one or a combination of the following design elements:
(a) respond to daylight, wind, and acoustic conditions to maximise comfort and	(a) sun screens (b) pergolas
provide visual privacy (b) allow views and casual surveillance of the street while providing for safety and	(c) louvres (d) green facades
visual privacy of nearby living spaces and private outdoor areas.	(d) green facades (e) openable walls.
PO 28.3	DTS/DPF 28.3
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimum dimension of 2m.
P0 28.4	DTS/DPF 28.4
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling:
	(a) studio: not less than 6m ³
	(b) 1 bedroom dwelling / apartment: not less than 8m ³
	(c) 2 bedroom dwelling / apartment: not less than 10m ³
	(d) 3+ bedroom dwelling / apartment: not less than 12m ³ .
D0.20 E	DTC/DDC 20 5
PO 28.5	DTS/DPF 28.5
Dwellings that use light wells for access to daylight, outlook and ventilation for habitable	Light wells:

Page 48 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
rooms, are designed to ensure a reasonable living amenity is provided.	(a) are not used as the primary source of (b) up to 18m in height have a minimum overlooked by bedrooms (c) above 18m in height have a minimum overlooked by bedrooms.	-
PO 28.6 Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	DTS/DPF 28.6 None are applicable.	
PO 28.7 Dwellings are designed so that internal structural columns correspond with the position of internal walls to ensure that the space within the dwelling/apartment is useable.	DTS/DPF 28.7 None are applicable.	
Dwelling C	onfiguration	
PO 29.1 Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.	(a) studio (where there is no separate by the studio (where there is no separate by the studio of th	n a floor area of at least 50m ²
PO 29.2 Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.	bedroom. DTS/DPF 29.2 None are applicable.	
Comm	on Areas	
PO 30.1 The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.	DTS/DPF 30.1 Common corridor or circulation areas: (a) have a minimum ceiling height of 2.7m (b) provide access to no more than 8 dwellings (c) incorporate a wider section at apartment entries where the corridors exceed 12m in length from a core.	
Group Dwellings, Residential Flat B	uildings and Battle axe Development	
Ап	enity	
PO 31.1 Dwellings are of a suitable size to provide a high standard of amenity for occupants.	DTS/DPF 31.1 Dwellings have a minimum internal floor area	in accordance with the following table:
	Number of bedrooms	Minimum internal floor area
	Studio	35m ²
	1 bedroom	50m ²
	2 bedroom	65m ²
	3+ bedrooms	80m² and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom
PO 31.2 The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	DTS/DPF 31.2 None are applicable.	
PO 31.3 Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	DTS/DPF 31.3 None are applicable.	
PO 31.4 Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	DTS/DPF 31.4 Dwelling sites/allotments are not in the form of a battle-axe arrangement.	
Communa	Open Space	
PO 32.1	DTS/DPF 32.1	
Private open space provision may be substituted for communal open space which is	None are applicable.	

Page 49 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Tonoy24 Enquiry	<u> </u>	
designed and sited to meet the recreation and amenity needs of residents.		
PO 32.2	DTS/DPF 32.2	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.	
P0 32.3	DTS/DPF 32.3	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.		
P0 32.4	DTS/DPF 32.4	
Communal open space contains landscaping and facilities that are functional, attractive	None are applicable.	
and encourage recreational use.	Trone are applicable.	
P0 32.5	DTS/DPF 32.5	
Communal open space is designed and sited to:	None are applicable.	
obininanai open space is acsigned and sited to.		
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.		
Car parking, access	and manoeuvrability	
P0 33.1	DTS/DPF 33.1	
Driveways and access points are designed and distributed to optimise the provision of on- street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:	
	requirements.	
	(a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the	
	nearest whole number)	
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two	
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.	
PO 33.2	DTS/DPF 33.2	
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.	
PO 33.3	DTS/DPF 33.3	
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:	
convenient movement.	(a) have a minimum width of 3m	
	(b) for driveways servicing more than 3 dwellings:	
	(i) have a width of 5.5m or more and a length of 6m or more at the kerb of	
	the primary street	
	(ii) where the driveway length exceeds 30m, incorporate a passing point at	
	least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.	
Dom I	DECEMBER OF T	
PO 33.4	DTS/DPF 33.4	
Residential driveways that service more than one dwelling or a dwelling on a battle-axe site	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more	
are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in	than a three-point turn manoeuvre.	
a safe and convenient manner.		
PO 33.5	DTS/DPF 33.5	
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of	
	vehicles.	
Soft lan	dscaping	
PO 34.1	DTS/DPF 34.1	
Soft landscaping is provided between dwellings and common driveways to improve the	Other than where located directly in front of a garage or building entry, soft landscaping	
outlook for occupants and appearance of common areas.	with a minimum dimension of 1m is provided between a dwelling and common driveway.	
2004	DECEMBER 14.0	
P0 34.2	DTS/DPF 34.2	
Battle-axe or common driveways incorporate landscaping and permeability to improve	Battle-axe or common driveways satisfy (a) and (b):	
appearance and assist in stormwater management.	(a) are constructed of a minimum of 50% normaphic or narrow material	
	(a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the	
	site, soft landscaping with a minimum dimension of 1m is provided between the	
	driveway and site boundary (excluding along the perimeter of a passing point).	
	/ Waste Storage	
PO 35.1	DTS/DPF 35.1	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the	None are applicable.	
	·	

Page 50 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Policy24 - Eriquity	
site or conveniently located considering the nature of accommodation and mobility of occupants.	
PO 35.2	DTS/DPF 35.2
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 35.3	DTS/DPF 35.3
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.
(a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point.	
PO 35.4	DTS/DPF 35.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 35.5	DTS/DPF 35.5
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.
PO 35.6	DTS/DPF 35.6
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
	re urban design
PO 36.1	DTS/DPF 36.1
Residential development creating a common driveway / access includes stormwater	None are applicable.
management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	Note are applicable.
PO 36.2	DTS/DPF 36.2
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Supported Accommodati	on and retirement facilities
Siting, Configur	ation and Design
PO 37.1	DTS/DPF 37.1
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
P0 37.2	DTS/DPF 37.2
Universal design features are incorporated to provide options for people living with	None are applicable.
disabilities or limited mobility and / or to facilitate ageing in place. Movement	and Access
PO 38.1	DTS/DPF 38.1
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.
(a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	
Communal	Open Space
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	DTS/DPF 39.1 None are applicable.
DD 20.2	DTC/DDC 20.2
PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	DTS/DFF 39.2 None are applicable.
PO 39.3	DTS/DPF 39.3

Page 51 of 102 Printed on 3/02/2022

1 Shoy24 Enquiry		
PO 39.4	DTS/DPF 39.4	
Communal open space is designed and sited to:	None are applicable.	
	положе ображава.	
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.		
PO 39.5	DTS/DPF 39.5	
Communal open space contains landscaping and facilities that are functional, attractive	None are applicable.	
and encourage recreational use.		
PO 39.6	DTS/DPF 39.6	
Communal open space is designed and sited to:	None are applicable.	
	Trone die approduce.	
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.		
Site Facilities /	Waste Storage	
PO 40.1	DTS/DPF 40.1	
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.	
PO 40.2	DTS/DPF 40.2	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the	None are applicable.	
site or conveniently located considering the nature of accommodation and mobility of occupants.		
PO 40.3	DTS/DPF 40.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 40.4	DTS/DPF 40.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.	
PO 40.5	DTS/DPF 40.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 40.6	DTS/DPF 40.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.		
PO 40.7	DTS/DPF 40.7	
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.	
Student Acc	ommodation	
P0 41.1	DTS/DPF 41.1	
Student accommodation is designed to provide safe, secure, attractive, convenient and	Student accommodation provides:	
comfortable living conditions for residents, including an internal layout and facilities that		
are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction.	a range of living options to meet a variety of accommodation needs, such as one- bedroom, two-bedroom and disability access units	
and promote social interaction.	(b) common or shared facilities to enable a more efficient use of space, including: (i) shared cooking, laundry and external drying facilities (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space (iii) common storage facilities at the rate of 8m³ for every 2 dwellings or students (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas (v) bicycle parking at the rate of one space for every 2 students.	
PO 41.2	DTS/DPF 41.2	
Student accommodation is designed to provide easy adaptation of the building to accommodate an alternative use of the building in the event it is no longer required for student housing.	None are applicable.	
All non-residen	ial development	
Water Sensitive Design		

Page 52 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
PO 42.1		DTS/DPF 42.1
nutrient	oment likely to result in risk of export of sediment, suspended solids, organic matter, is, oil and grease include stormwater management systems designed to minimise nts entering stormwater.	None are applicable.
PO 42.2		DTS/DPF 42.2
	lischarged from a development site is of a physical, chemical and biological on equivalent to or better than its pre-developed state.	None are applicable.
PO 42.3		DTS/DPF 42.3
manage	oment includes stormwater management systems to mitigate peak flows and the rate and duration of stormwater discharges from the site to ensure that ment does not increase peak flows in downstream systems.	None are applicable.
	Wash-down and Waste	Loading and Unloading
PO 43.1		DTS/DPF 43.1
comme	or activities including loading and unloading, storage of waste refuse bins in crcial and industrial development or wash-down areas used for the cleaning of s, plant or equipment are:	None are applicable.
(a) (b)	designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off paved with an impervious material to facilitate wastewater collection	
(c)	of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area	
(d)	are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or	
	(ii) a holding tank and its subsequent removal off-site on a regular basis.	
	Laneway D	L evelopment
	Infrastructur	e and Access
PO 44.1		DTS/DPF 44.1
	oment with a primary street comprising a laneway, alley, lane, right of way or minor thoroughfare only occurs where:	Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.
(a)	existing utility infrastructure and services are capable of accommodating the development	
(b)	the primary street can support access by emergency and regular service vehicles (such as waste collection)	
(c)	it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems) $ \\$	
(d)	safety of pedestrians or vehicle movement is maintained	
(e)	any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.	

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site Configuration	Minimum Rate
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.
Dwelling in a residential flat building or mixed use building which incorporate above ground level	Dwellings at ground level:	15m ² / minimum dimension 3m
dwellings	Dwellings above ground level:	
	Studio (no separate bedroom)	4m ² / minimum dimension 1.8m
	One bedroom dwelling	8m ² / minimum dimension 2.1m

Page 53 of 102 Printed on 3/02/2022

Two bedroom dwelling	11m ² / minimum dimension 2.4m
Three + bedroom dwelling	15 m ² / minimum dimension 2.6m

Forestry

Assessment Provisions (AP)

	Desired Outcome
DO 1	Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
s	iting	
P0 1.1	DTS/DPF 1.1	
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.	
P01.2	DTS/DPF 1.2	
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).	
P0 1.3	DTS/DPF 1.3	
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.	
P0 1.4	DTS/DPF 1.4	
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	71	
Water R	Protection	
P0 2.1	DTS/DPF 2.1	
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	None are applicable.	
P0 2.2	DTS/DPF 2.2	
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	Commercial forestry plantations: (a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer) (c) are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).	
Fire Ma	nagement	
P0 3.1	DTS/DPF 3.1	
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	(a) 7m or more wide external boundary firebreaks for plantations of 40ha or less (b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha (c) 20m or more wide external boundary firebreaks, or 10m with an additional 10m or more of fuel-reduced plantation, for plantations of 100ha or greater.	
P0 3.2	DTS/DPF 3.2	
Commercial forestry plantations incorporate appropriate fire management access tracks.		

Page 54 of 102 Printed on 3/02/2022

		vertical clearanc ght through acces ppropriately sign ghting vehicles	ss at junctions, or if they are a no posted and provide suitable
Power-line	e Clearances		
PO 4.1 Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines.	DTS/DPF4.1 Commercial forestry plantations incorporating trees with an expected mature height of greater than 6m meet the clearance requirements listed in the following table:		
	Voltage of transmission line	Tower or Pole	Minimum horizontal clearance distance between plantings and transmission lines
	500 kV	Tower	38m
	275 kV	Tower	25m
	132 kV	Tower	30m
	132 kV	Pole	20m
	66 kV	Pole	20m
	Less than 66 kV	Pole	20m

Housing Renewal

Assessment Provisions (AP)

	Desired Outcome
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Use a	and Intensity	
P0 1.1	DTS/DPF 1.1	
Residential development provides a range of housing choices.	Development comprises one or more of the following: (a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings.	
PO 1.2	DTS/DPF 1.2	
Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.	
Building Height		
P0 2.1	DTS/DPF 2.1	
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).	
PO 2.2	DTS/DPF 2.2	
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height	None are applicable.	

Page 55 of 102 Printed on 3/02/2022

Policy24 - Enquiry			
towards the boundary of that zone, other than where it is a street boundary.			
Primary St	Treet Setback		
P0 3.1	DTS/DPF 3.1		
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah, porch, awning or similar structure) than 3m.		
Secondary S	Street Setback		
PO 4.1	DTS/DPF 4.1		
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.		
Bounda	I ary Walls		
P0 5.1	DTS/DPF 5.1		
Boundary walls are limited in height and length to manage visual impacts and access to natural light and ventilation.	Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b):		
	(a) adjoin or abut a boundary wall of a building on adjoining land for the same length and height (b) do not: (i) exceed 3.2m in height from the lower of the natural or finished ground level (ii) exceed 11.5m in length (iii) when combined with other walls on the boundary of the subject development site, a maximum 45% of the length of the boundary (iv) encroach within 3 metres of any other existing or proposed boundary walls on the subject land.		
PO 5.2	DTS/DPF 5.2		
Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape character.	Dwellings in a semi-detached or row arrangement are set back 900mm or more from side boundaries shared with allotments outside the development site, except for a carport or garage.		
Side Bound	dary Setback		
PO 6.1	DTS/DPF 6.1		
Buildings are set back from side boundaries to provide:	Other than walls located on a side boundary, buildings are set back from side boundaries:		
(a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours.	at least 900mm where the wall height is up to 3m other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m at least 1.9m plus 1/3 of the wall height above 3m for walls facing a southern side boundary.		
Rear Bound	dary Setback		
P0 7.1	DTS/DPF 7.1		
Buildings are set back from rear boundaries to provide:	Dwellings are set back from the rear boundary:		
(a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation.	(a) 3m or more for the first building level (b) 5m or more for any subsequent building level.		
5.49	L. Austien decian		
	evation design		
P0 8.1 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:		
	 (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building elevation (c) a balcony projects from the building elevation (d) a verandah projects at least 1m from the building elevation (e) eaves of a minimum 400mm width extend along the width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish. 		

Page 56 of 102 Printed on 3/02/2022

Policy24 - Enquiry			
P0 8.2	DTS/DPF 8.2		
Dwellings incorporate windows along primary street frontages to encourage passive	Each dwelling with a fronta	age to a public street:	
surveillance and make a positive contribution to the streetscape.	(a) includes at least o	ne window facing the primary	street from a habitable room that
		ternal room dimension of 2.4m	
	(b) has an aggregate	window area of at least 2m ² fa	acing the primary street
PO 8.3	DTS/DPF 8.3		
The visual mass of larger buildings is reduced when viewed from adjoining allotments or	None are applicable.		
public streets.	None are applicable.		
P0 8.4	DTS/DPF 8.4		
Built form considers local context and provides a quality design response through scale,	None are applicable.		
massing, materials, colours and architectural expression.			
PO 8.5	DTS/DPF 8.5		
Entrances to multi-storey buildings are:	None are applicable.		
(a) oriented towards the street			
(b) visible and easily identifiable from the street			
(c) designed to include a common mail box structure.			
	nd amonity		
	nd amenity		
P0 9.1	DTS/DPF 9.1		
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling street frontage or private of		n external outlook towards the
PO 9.2	DTS/DPF 9.2		
Bedrooms are separated or shielded from active communal recreation areas, common	None are applicable.		
access areas and vehicle parking areas and access ways to mitigate noise and artificial			
light intrusion.			
Private 0	pen Space		
PO 10.1	DTS/DPF 10.1		
Dwellings are provided with suitable sized areas of usable private open space to meet the	Private open space is prov	ided in accordance with the fo	llowing table:
needs of occupants.			
	Dwelling Type	Dwelling / Site	Minimum Rate
		Configuration	
		, and the second	
	Dwelling (at ground level)		Total area: 24m ² located behind the building line
			Minimum adjacent to a living
			room: 16m ² with a minimum dimension 3m
	Dwelling (above ground	Studio	4m ² / minimum dimension 1.8m
	level)	One bedroom dwelling	8m ² / minimum dimension 2.1m
		-	11m ² / minimum dimension
		Two bedroom dwelling	2.4m
		Three + bedroom dwelling	15 m ² / minimum dimension 2.6m
PO 10.2	DTS/DPF 10.2	ı	1
Private open space positioned to provide convenient access from internal living areas.	At least 50% of the require	d area of private open space is	s accessible from a habitable
,	room.	p	
PO 10.3	DTS/DPF 10.3		
Private open space is positioned and designed to:	None are applicable.		
(a) provide useable outdoor space that suits the needs of occupants;			
(b) take advantage of desirable orientation and vistas; and			
(c) adequately define public and private space.			
Visual	privacy		
PO 11.1	DTS/DPF 11.1		
Development mitigates direct overlooking from upper level windows to habitable rooms	Upper level windows facing	g side or rear boundaries share	ed with another residential

Page 57 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
	(a) are permanently obscured to a height of 1.5m above finished fixed or not capable of being opened more than 200mm (b) have sill heights greater than or equal to 1.5m above finished fixed incorporate screening with a maximum of 25% openings, permore than 500mm from the window surface and sited adjacer window less than 1.5m above the finished floor.	loor level anently fixed no
PO 11.2	DTS/DPF 11.2	
Development mitigates direct overlooking from upper level balconies and terraces to	One of the following is satisfied:	
habitable rooms and private open space of adjoining residential uses.	(a) the longest side of the balcony or terrace will face a public roar reserve or public reserve that is at least 15m wide in all places balcony or terrace or (b) all sides of balconies or terraces on upper building levels are pobscured by screening with a maximum 25% transparency/opminimum height of:	faced by the ermanently enings fixed to a accated at least 15
	or (ii) 1.7m above finished floor level in all other cases	
Land:	scaping	
PO 12.1	DTS/DPF 12.1	
Soft landscaping is incorporated into development to: (a) minimise heat absorption and reflection (b) maximise shade and shelter	Residential development incorporates pervious areas for soft landscap dimension of 700mm provided in accordance with (a) and (b): (a) a total area as determined by the following table:	ing with a minimum
(c) maximise strade and shelter (d) maximise stormwater infiltration and biodiversity		<u> </u>
(d) enhance the appearance of land and streetscapes.	Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
	<150 <200	10% 15%
	200-450	20%
	(b) at least 30% of land between the road boundary and the building	25% ng line.
Water Sen	 sitive Design	
P0 13.1	DTS/DPF 13.1	
Residential development is designed to capture and use stormwater to:	None are applicable.	
 (a) maximise efficient use of water resources (b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage runoff quality to maintain, as close as practical, pre-development conditions. 		
Car F	Parking	
P0 14.1	DTS/DPF 14.1	
On-site car parking is provided to meet the anticipated demand of residents, with less on- site parking in areas in close proximity to public transport.	On-site car parking is provided at the following rates per dwelling: (a) 2 or fewer bedrooms - 1 car parking space (b) 3 or more bedrooms - 2 car parking spaces.	
P0 14.2	DTS/DPF 14.2	
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.		
	(a) single parking spaces: (i) a minimum length of 5.4m (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.5m (iii) minimum garage door width of 2.4m per space.	
P0 14.3	DTS/DPF 14.3	
Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m	

Page 58 of 102 Printed on 3/02/2022

Policy24 - Eriquity	
	(b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.
PO 14.4	DTS/DPF 14.4
Residential flat buildings and group dwelling developments provide sufficient on-site visitor car parking to cater for anticipated demand.	
PO 14.5	DTS/DPF 14.5
Residential flat buildings provide dedicated areas for bicycle parking.	Residential flat buildings provide one bicycle parking space per dwelling.
Oversh	adowing
P0 15.1	DTS/DPF 15.1
Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	None are applicable.
W	aste
P0 16.1	DTS/DPF 16.1
Provision is made for the convenient storage of waste bins in a location screened from public view.	(a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.
PO 16.2	DTS/DPF 16.2
Residential flat buildings provide a dedicated area for the on-site storage of waste which is:	None are applicable.
easily and safely accessible for residents and for collection vehicles screened from adjoining land and public roads of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection.	
Vehicle	e Access
P0 17.1	DTS/DPF 17.1
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	None are applicable.
P0 17.2	DTS/DPF 17.2
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads outside of the marked lines or infrastructure dedicating a pedestrian crossing.
P0 17.3	DTS/DPF 17.3
Driveways are designed to enable safe and convenient vehicle movements from the public	Driveways are designed and sited so that:
road to on-site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not more than 1-in-4 on average (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site.
P0 17.4	DTS/DPF 17.4
Driveways and access points are designed and distributed to optimise the provision of onstreet parking.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements:
	minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)

Page 59 of 102 Printed on 3/02/2022

1 Olloy24 Enquiry	
	2. Minimum car park length of 5.4m where a vehicle can enter or exit a space directly 3. minimum car park length of 6m for an intermediate space located between two other parking spaces.
P0 17.5	DTS/DPF 17.5
Residential driveways that service more than one dwelling of a dimension to allow safe and convenient movement.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements:
	(a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 17.6	DTS/DPF 17.6
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre
PO 17.7	DTS/DPF 17.7
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Sto	rage
P0 18.1	DTS/DPF 18.1
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling:
	(a) studio: not less than 6m ³
	(b) 1 bedroom dwelling / apartment: not less than 8m ³
	(c) 2 bedroom dwelling / apartment: not less than 10m ³ (d) 3+ bedroom dwelling / apartment: not less than 12m ³ .
	3+ bedroom dwelling / apartment, not less than 12m.
Earth	works
P0 19.1	DTS/DPF 19.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	The development does not involve: (a) excavation exceeding a vertical height of 1m
	or
	(b) filling exceeding a vertical height of 1m or
	(c) a total combined excavation and filling vertical height exceeding 2m.
Service connection	is and infrastructure
PO 20.1	DTS/DPF 20.1
Dwellings are provided with appropriate service connections and infrastructure.	The site and building:
	(a) have the ability to be connected to a permanent potable water supply
	(b) have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011
	(c) have the ability to be connected to electricity supply
	(d) have the ability to be connected to an adequate water supply (and pressure) for fire-fighting purposes
	(e) would not be contrary to the Regulations prescribed for the purposes of Section
	86 of the Electricity Act 1996.
Site conf	I amination
PO 21.1	DTS/DPF 21.1
Land that is suitable for sensitive land uses to provide a safe environment.	Development satisfies (a), (b), (c) or (d):
	(a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a <u>more</u> sensitive use
	(c) involves a change in the use of land to a <u>more sensitive use</u> on land at which <u>site</u> <u>contamination</u> does not exist (as demonstrated in a <u>site contamination declaration</u> form)
	(d) involves a change in the use of land to a <u>more sensitive use</u> on land at which <u>site</u> <u>contamination</u> exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following:
	 a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous
	5 years which states that A. site contamination does not exist (or no longer exists) at the land or
	B. the land is suitable for the proposed use or range of uses

Page 60 of 102 Printed on 3/02/2022

		(without the need for any further <u>remediation</u>) or
	C.	where <u>remediation</u> is, or remains, necessary for the proposed use (or range of uses), <u>remediation work</u> has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)
400	and	
(ii)	since th	or <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land ne preparation of the site contamination audit report (as strated in a <u>site contamination declaration form</u>).

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

	Desired Outcome
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
G	eneral
P0 1.1	DTS/DPF 1.1
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.
Visua	I Amenity
P021	DTS/DPF 2.1
The visual impact of above-ground infrastructure networks and services (excluding high voltage transmission lines), renewable energy facilities (excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by:	None are applicable.
(a) utilising features of the natural landscape to obscure views where practicable (b) siting development below ridgelines where practicable (c) avoiding visually sensitive and significant landscapes (d) using materials and finishes with low-reflectivity and colours that complement the surroundings (e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the perimeter of a site	
and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers.	DTS/DPF 2.2
Pumping stations, battery storage facilities, maintenance sheds and other ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land.	None are applicable.
P0 2.3	DTS/DPF 2.3
Surfaces exposed by earthworks associated with the installation of storage facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land.	None are applicable.
Reha	bilitation
P0 3.1	DTS/DPF 3.1
Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead of or upor decommissioning of areas used for renewable energy facilities and transmission corridors	
Hazard N	Management
PO 4.1	DTS/DPF 4.1
Infrastructure and renewable energy facilities and ancillary development located and	None are applicable.

Page 61 of 102 Printed on 3/02/2022

Policy24 - Enquiry

Policy24 - Eriquity	
operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips.	
P0 4.2	DTS/DPF 4.2
Facilities for energy generation, power storage and transmission are separated as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	None are applicable.
PO 4.3	DTS/DPF 4.3
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.
Electricity Infrastructure ar	nd Battery Storage Facilities
PO 5.1	DTS/DPF 5.1
Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
(a) siting utilities and services: (i) on areas already cleared of native vegetation (ii) where there is minimal interference or disturbance to existing native vegetation or biodiversity	
(b) grouping utility buildings and structures with non-residential development, where practicable.	
P0 5.2	DTS/DPF 5.2
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.
PO 5.3	DTS/DPF 5.3
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.
Telecommunic	cation Facilities
PO 6.1	DTS/DPF 6.1
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed, where technically feasible, by co-locating a facility with other communications facilities to mitigate impacts from clutter on visual amenity.	None are applicable.
P0.6.2 Telecommunications antennae are located as close as practicable to support structures to manage overall bulk and mitigate impacts on visual amenity.	DTS/DPF 6.2 None are applicable.
P0 6.3	DTS/DPF 6.3
Telecommunications facilities, particularly towers/monopoles, are located and sized to mitigate visual impacts by the following methods:	None are applicable.
(a) where technically feasible, incorporating the facility within an existing structure that may serve another purpose	
or all of the following:	
using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services using materials and finishes that complement the environment screening using landscaping and vegetation, particularly for equipment shelters and huts.	
Danawahla Er	nergy Facilities
PO 7.1	DTS/DPF 7.1
Renewable energy facilities are located as close as practicable to existing transmission infrastructure to facilitate connections and minimise environmental impacts as a result of extending transmission infrastructure.	None are applicable.
Renewable Energy F	acilities (Wind Farm)
PO 8.1	DTS/DPF 8.1
Visual impact of wind turbine generators on the amenity of residential and tourist development is reduced through appropriate separation.	Wind turbine generators are: (a) set back at least 2000m from the base of a turbine to any of the following zones:
<u> </u>	55t back at least 2000m from the base of a tarbiffe to any of the following zones.

Page 62 of 102 Printed on 3/02/2022

Policy24 - Eriquity	
DO 0.2	(i) Rural Settlement Zone (ii) Township Zone (iii) Rural Living Zone (iv) Rural Neighbourhood Zone with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine). (b) set back at least 1500m from the base of the turbine to non-associated (non-stakeholder) dwellings and tourist accommodation
P0 8.2	DTS/DPF 8.2
The visual impact of wind turbine generators on natural landscapes is managed by: (a) designing wind turbine generators to be uniform in colour, size and shape (b) coordinating blade rotation and direction (c) mounting wind turbine generators on tubular towers as opposed to lattice towers.	None are applicable.
PO 8.3 Wind turbine generators and ancillary development minimise potential for bird and bat strike.	DTS/DPF 8.3 None are applicable.
P0 8.4	DTS/DPF 8.4
Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.	No Commonwealth air safety (CASA / ASA) or Defence requirement is applicable.
PO 8.5	DTS/DPF 8.5
Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing strobes.	None are applicable.
Renewable Energy F.	acilities (Solar Power)
PO 9.1	DTS/DPF 9.1
Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	None are applicable.
PO 9.2	DTS/DPF 9.2
Ground mounted solar power facilities allow for movement of wildlife by:	None are applicable.
incorporating wildlife corridors and habitat refuges avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility.	
PO 9.3	DTS/DPF 9.3
Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership.	Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria:
	Generation Capacity Approximate size of array Capacity Approximate size of array Approximate size of array Approximate size of array Approximate adjoining land from conservation areas Capacity Approximate size of array Approximate adjoining land from areas Capacity Approximate size of array Approximate adjoining land from conservation areas Capacity Approximate size of array Approximate adjoining land from conservation areas Capacity Capacity Approximate size of array Approximate adjoining land from conservation areas
	50MW> 80ha+ 30m 500m 2km
	10MW<50MW 16ha-<80ha 25m 500m 1.5km
	5MW<10MW 8ha to <16ha 20m 500m 1km
	1MW<5MW 1.6ha to <8ha 15m 500m 500m
	100kW<1MW 0.5ha<1.6ha 10m 500m 100m
	<100kW <0.5ha 5m 500m 25m
	Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones.
PO 9.4	DTS/DPF 9.4
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host	None are applicable.

Page 63 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
dwellings, where balanced with infrastructure access and bushfire safety considerations.		
Hydropower / Pumpe	d Hydropower Facilities	
PO 10.1	DTS/DPF 10.1	
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applicable.	
PO 10.2	DTS/DPF 10.2	
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applicable.	
P0 10.3	DTS/DPF 10.3	
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	None are applicable.	
Water	Supply	
P0 11.1	DTS/DPF 11.1	
Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	Development is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the on-going requirements of the development.	
P0 11.2	DTS/DPF 11.2	
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.	A dwelling is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the development. Where this is not available it is serviced by a rainwater tank or tanks capable of holding at least 50,000 litres of water which is: (a) exclusively for domestic use	
	(a) exclusively for domestic use (b) connected to the roof drainage system of the dwelling.	
Wastewa	ter Services	
PO 12.1	DTS/DPF 12.1	
Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the following:	Development is connected, or will be connected, to an approved common wastewater disposal service with the capacity to meet the requirements of the development. Where this is not available it is instead capable of being serviced by an on-site waste water treatment system in accordance with the following:	
(a) it is wholly located and contained within the allotment of the development it will service	(a) the system is wholly located and contained within the allotment of development it will service; and	
(b) in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources (c) septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm.	(b) the system will comply with the requirements of the South Australian Public Health Act 2011.	
PO 12.2	DTS/DPF 12.2	
Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.	
Tempora	ry Facilities	
P0 13.1	DTS/DPF 13.1	
In rural and remote locations, development that is likely to generate significant waste material during construction, including packaging waste, makes provision for a temporary on-site waste storage enclosure to minimise the incidence of wind-blown litter.	A waste collection and disposal service is used to dispose of the volume of waste at the rate it is generated.	
P0 13.2	DTS/DPF 13.2	
Temporary facilities to support the establishment of renewable energy facilities (including borrow pits, concrete batching plants, laydown, storage, access roads and worker amenity areas) are sited and operated to minimise environmental impact.	None are applicable.	
	I .	

Intensive Animal Husbandry and Dairies

Assessment Provisions (AP)

	Desired Outcome
DO 1	

Page 64 of 102 Printed on 3/02/2022

Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	nd Design
P0 1.1	DTS/DPF 1.1
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.
PO 1.3	DTS/DPF 1.3
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.
PO 1.4	DTS/DPF 1.4
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.
PO 1.5	DTS/DPF 1.5
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.
Wa	inste
P0 2.1	DTS/DPF 2.1
Storage of manure, used litter and other wastes (other than waste water lagoons) is sited, designed, constructed and managed to:	None are applicable.
(a) avoid attracting and harbouring vermin (b) avoid polluting water resources (c) be located outside 1% AEP flood event areas.	
Soil and Wa	Ler Protection
P0 3.1	DTS/DPF 3.1
To avoid environmental harm and adverse effects on water resources, intensive animal husbandry operations are appropriately set back from: (a) public water supply reservoirs (b) major watercourses (third order or higher stream) (c) any other watercourse, bore or well used for domestic or stock water supplies.	Intensive animal husbandry operations are set back: (a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.
P0 3.2	DTS/DPF 3.2
Intensive animal husbandry operations and dairies incorporate appropriately designed effluent and run-off facilities that:	None are applicable.
have sufficient capacity to hold effluent and runoff from the operations on site ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.	

Interface between Land Uses

Assessment Provisions (AP)

Desired Outcome	
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Page 65 of 102 Printed on 3/02/2022

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome		tisfy Criteria / Designated
General Land I	Jse Compatibility	inanoc i catare
P0 1.1	DTS/DPF 1.1	
Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	None are applicable.	
P01.2	DTS/DPF 1.2	
Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts.	None are applicable.	
Hours of	Operation	
Po 2.1 Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an adjacent zone primarily for	DTS/DPF 2.1 Development operating within the f	ollowing hours:
sensitive receivers through its hours of operation having regard to:	Class of Development	Hours of operation
(a) the nature of the development (b) measures to mitigate off-site impacts (c) the extent to which the development is desired in the zone (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended	Consulting room	7am to 9pm, Monday to Friday 8am to 5pm, Saturday
use of that land.	Office	7am to 9pm, Monday to Friday 8am to 5pm, Saturday
	Shop, other than any one or combination of the following: (a) restaurant (b) cellar door in the Productive Rural Landscape Zone, Rural Zone or Rural Horticulture Zone	7am to 9pm, Monday to Friday 8am to 5pm, Saturday and Sunday
Overst	adowing	
P0 3.1 Overshadowing of habitable room windows of adjacent residential land uses in: a. a neighbourhood-type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	7	rooms of adjacent residential land uses in a t least 3 hours of direct sunlight between 9.00am and
PO 3.2 Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in: a. a neighbourhood type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	June to adjacent residential land us following: a. for ground level private open spi. half the existing ground level op or	
	dimensions measuring 2.5m)	n space, at least half of the existing ground level open
PO 3.3	DTS/DPF 3.3	
Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account: (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed.	None are applicable.	
PO 3.4	DTS/DPF 3.4	

Page 66 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
Development that incorporates moving parts, including windmills and wind farms, are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker.	None are applicable.	
Activities Generating Noise or Vibration		
P0 4.1	DTS/DPF 4.1	
Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.	
P0 4.2	DTS/DPF 4.2	
Areas for the on-site manoeuvring of service and delivery vehicles, plant and equipment, outdoor work spaces (and the like) are designed and sited to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including:	None are applicable.	
(a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers		
(b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers		
(c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone.		
PO 4.3	DTS/DPF 4.3	
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming	The pump and/or filtration system ancillary to a dwelling erected on the same site is:	
pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers).	(a) enclosed in a solid acoustic structure located at least 5m from the nearest habitable room located on an adjoining allotment	
	or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.	
P0 4.4	DTS/DPF 4.4	
External noise into bedrooms is minimised by separating or shielding these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment.	Adjacent land is used for residential purposes.	
P0 4.5	DTS/DPF 4.5	
Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
PO 4.6	DTS/DPF 4.6	
Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers.	Development incorporating music includes noise attenuation measures that will achieve the following noise levels:	
	Assessment location Music noise level	
	Externally at the nearest existing or envisaged noise sensitive location Less than 8dB above the level of background noise ($L_{90,15min}$) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)	
Air (Quality	
P0 5.1	DTS/DPF 5.1	
Development with the potential to emit harmful or nuisance-generating air pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers.	None are applicable.	
P0 5.2	DTS/DPF 5.2	
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:	None are applicable.	
(a) incorporating appropriate treatment technology before exhaust emissions are released		
(b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers.		
Ligh	t Spill	
P0 6.1	DTS/DPF 6.1	

Page 67 of 102 Printed on 3/02/2022

Policy24 - Eriquity		
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
P0 6.2	DTS/DPF 6.2	
External lighting is not hazardous to motorists and cyclists.	None are applicable.	
Solar Refle	ctivity / Glare	
P0.7.1	DTS/DPF 7.1	
Development is designed and comprised of materials and finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare.	None are applicable.	
Electrical	Interference	
PO 8.1	DTS/DPF 8.1	
Development in rural and remote areas does not unreasonably diminish or result in the loss of existing communication services due to electrical interference.	The building or structure: (a) is no greater than 10m in height, measured from existing ground level or (b) is not within a line of sight between a fixed transmitter and fixed receiver (antenna) other than where an alternative service is available via a different fixed transmitter or cable.	
Interface with	Rural Activities	
PO 9.1 Sensitive receivers are located and designed to mitigate impacts from lawfully existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities.	DTS/DPF 9.1 None are applicable.	
PO 9.2	DTS/DPF 9.2	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing land-based aquaculture activities and do not prejudice the continued operation of these activities.	Sensitive receivers are located at least 200m from the boundary of a site used for land-based aquaculture and associated components in other ownership.	
PO 9.4	DTS/DPF 9.4	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing dairies including associated wastewater lagoons and liquid/solid waste storage and disposal facilities and do not prejudice the continued operation of these activities.	Sensitive receivers are sited at least 500m from the boundary of a site used for a dairy and associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities in other ownership.	
PO 9.5	DTS/DPF 9.5	
Sensitive receivers are located and designed to mitigate the potential impacts from lawfully existing facilities used for the handling, transportation and storage of bulk commodities (recognising the potential for extended hours of operation) and do not prejudice the continued operation of these activities.	Sensitive receivers are located away from the boundary of a site used for the handling, transportation and/or storage of bulk commodities in other ownership in accordance with the following: (a) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility	
	(b) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day (c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.	
PO 9.6	DTS/DPF 9.6	
Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	None are applicable.	
PO 9.7	DTS/DPF 9.7	
Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	None are applicable.	
•		

Page 68 of 102 Printed on 3/02/2022

Interface with Mines and Quarries (Rural and Remote Areas)	
PO 10.1	DTS/DPF 10.1
Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act 1971</i> .

Land Division

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Land division:		
	 (a) creates allotments with the appropriate dimensions and shape for their intended use (b) allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure (c) integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features (d) facilitates solar access through allotment orientation (e) creates a compact urban form that supports active travel, walkability and the use of public transport (f) avoids areas of high natural hazard risk. 		

Performance Outcome	Deemed-to-Satisfy Criteria / Designated
	Performance Feature
	d division
	configuration
P0 1.1	DTS/DPF 1.1
Land division creates allotments suitable for their intended use.	Division of land satisfies (a) or (b):
	(a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.
P0 1.2	DTS/DPF 1.2
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality.	None are applicable.
Design a	and Layout
P0 2.1	DTS/DPF 2.1
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls.	None are applicable.
P0 2.2	DTS/DPF 2.2
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones.	None are applicable.
P0 2.3	DTS/DPF 2.3
Land division maximises the number of allotments that face public open space and public streets.	None are applicable.
P024	DTS/DPF 2.4
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure.	None are applicable.
P0 2.5	DTS/DPF 2.5
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services.	None are applicable.
P0 2.6	DTS/DPF 2.6
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	None are applicable.
PO 2.7	DTS/DPF 2.7
Land division results in legible street patterns connected to the surrounding street network.	None are applicable.

Page 69 of 102 Printed on 3/02/2022

PO 2.8	DTS/DPF 2.8
Land division is designed to preserve existing vegetation of value including native vegetation and regulated and significant trees.	None are applicable.
Roads a	nd Access
P0 3.1	DTS/DPF 3.1
Land division provides allotments with access to an all-weather public road.	None are applicable.
P0 3.2	DTS/DPF 3.2
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3
Land division does not impede access to publicly owned open space and/or recreation facilities.	None are applicable.
P0 3.4	DTS/DPF 3.4
Road reserves provide for safe and convenient movement and parking of projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles.	None are applicable.
PO 3.5	DTS/DPF 3.5
Road reserves are designed to accommodate pedestrian and cycling infrastructure, street tree planting, landscaping and street furniture.	None are applicable.
PO 3.6	DTS/DPF 3.6
Road reserves accommodate stormwater drainage and public utilities.	None are applicable.
P0 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.9	DTS/DPF 3.9
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.10	DTS/DPF 3.10
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
P0 3.11	DTS/DPF 3.11
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.
	rructure
PO 4.1	DTS/DPF 4.1
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.
P0 4.2	DTS/DPF 4.2
Waste water, sewage and other effluent is capable of being disposed of from each	Each allotment can be connected to:
allotment without risk to public health or the environment.	a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment
	or (b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.
PO 4.3	DTS/DPF 4.3
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.
PO 4.4	DTS/DPF 4.4
Constructed wetland systems, including associated detention and retention basins, are	None are applicable.
sited and designed to ensure public health and safety is protected, including by minimising	

Page 70 of 102 Printed on 3/02/2022

potential public health risks arising from the breeding of mosquitoes.	
PO 4.5	DTS/DPF 4.5
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.
PO 4.6	DTS/DPF 4.6
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.
Minor Land Division	Under 20 Allotments)
Open	Space
PO 5.1	DTS/DPF 5.1
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.
Solar O	ientation
PO 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
Water Sens	itive Design
PO 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
P07.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Battle-Axe l	Development Control of the Control o
PO 8.1	DTS/DPF 8.1
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.
P0 8.2 Battle-axe development designed to allow safe and convenient movement.	DTS/DPF 8.2 The handle of a battle-axe development:
	(a)
	(a) has a minimum width of 4m
	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m.
PO 8.3	or
PO 8.3 Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m.
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. PO 8.4	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. PO 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division Open	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division Open P0 9.1 Land division allocates or retains evenly distributed, high quality areas of open space to	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). In (20+ Allotments) Space DTS/DPF 9.1
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division Open P0 9.1 Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). In (20+ Allotments) Space DTS/DPF 9.1 None are applicable.
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division Open P0 9.1 Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration. P0 9.2 Land allocated for open space is suitable for its intended active and passive recreational	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). In (20+ Allotments) Space DTS/DPF 9.1 None are applicable.
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division Open P0 9.1 Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration. P0 9.2 Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). In (20+ Allotments) Space DTS/DPF 9.1 None are applicable. DTS/DPF 9.2 None are applicable.
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner. P0 8.4 Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management. Major Land Division Open P0 9.1 Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration. P0 9.2 Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation. P0 9.3 Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m. DTS/DPF 8.3 Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre. DTS/DPF 8.4 Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). In (20+ Allotments) Space DTS/DPF 9.1 None are applicable. DTS/DPF 9.2 None are applicable.

Page 71 of 102 Printed on 3/02/2022

Policy24 - Enquiry

PO 10.1 Land division creating 20 or more residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	DTS/DPF 10.1 None are applicable.	
PO 10.2 Land division creating 20 or more non-residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	DTS/DPF 10.2 None are applicable.	
PO 10.3 Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	DTS/DPF 10.3 None are applicable.	
Solar Orientation		
PO 11.1 Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	DTS/DPF 11.1 None are applicable.	

Marinas and On-Water Structures

Assessment Provisions (AP)

	Desired Outcome
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation	on and Safety
PO 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
P0 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and on-water structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
P0 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and on-water structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
PO 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the operation or function of a water supply pumping station.	On-water structures are set back: (a) 3km or more from upstream water supply pumping station take-off points (b) 500m or more from downstream water supply pumping station take-off points.
PO 1.6	DTS/DPF 1.6
Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmental Protection	
P0 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.

Page 72 of 102 Printed on 3/02/2022

Open Space and Recreation

Assessment Provisions (AP)

Desired Outcome Do 1 Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated
	Performance Feature
Land Use a	and Intensity
PO 1.1	DTS/DPF 1.1
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.
P0 1.2	DTS/DPF 1.2
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.
Design a	and Siting
P0 2.1	DTS/DPF 2.1
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.
P0 2.2	DTS/DPF 2.2
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.
PO 2.3	DTS/DPF 2.3
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.
Pedestrians	and Cyclists
P0 3.1	DTS/DPF 3.1
Open space incorporates:	None are applicable.
pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; safe crossing points where pedestrian routes intersect the road network; easily identified access points.	
Usa	bility
P0 4.1	DTS/DPF 4.1
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.
Safety an	nd Security
P0 5.1	DTS/DPF 5.1
Open space is overlooked by housing, commercial or other development to provide casual surveillance where possible.	None are applicable.
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.
P0 5.3	DTS/DPF 5.3
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
P0 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to minimise potential entrapment.	None are applicable.

Page 73 of 102 Printed on 3/02/2022

- Silvy E. Higher		
PO 5.5	DTS/DPF 5.5	
Adequate lighting is provided around toilets, telephones, seating, litter bins, bicycle storage, car parks and other such facilities.	None are applicable.	
PO 5.6	DTS/DPF 5.6	
Pedestrian and bicycle movement after dark is focused along clearly defined, adequately lit routes with observable entries and exits.	None are applicable.	
Sign	nage	
PO 6.1	DTS/DPF 6.1	
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	None are applicable.	
Buildings ar	nd Structures	
P0 7.1	DTS/DPF7.1	
Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	None are applicable.	
P07.2	DTS/DPF 7.2	
Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	None are applicable.	
P0 7.3	DTS/DPF 7.3	
Development in open space is constructed to minimise the extent of impervious surfaces.	None are applicable.	
P07.4	DTS/DPF 7.4	
Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	None are applicable.	
Lands	caping	
PO 8.1	DTS/DPF 8.1	
Open space and recreation facilities provide for the planting and retention of large trees and vegetation.	None are applicable.	
PO 8.2	DTS/DPF 8.2	
Landscaping in open space and recreation facilities provides shade and windbreaks:	None are applicable.	
(a) along cyclist and pedestrian routes; (b) around picnic and barbecue areas; (c) in car parking areas.		
PO 8.3	DTS/DPF 8.3	
Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	None are applicable.	
PO 8.4	DTS/DPF 8.4	
Landscaping including trees and other vegetation passively watered with local rainfall runoff, where practicable.	None are applicable.	

Out of Activity Centre Development

Assessment Provisions (AP)

DO1 The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a range of shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Non-residential development outside Activity Centres of a scale and type that does not diminish the role of Activity Centres: (a) as primary locations for shopping, administrative, cultural, entertainment and community services (b) as a focus for regular social and business gatherings (c) in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	None are applicable.

Page 74 of 102 Printed on 3/02/2022

P0 1.2	DTS/DPF 1.2
Out-of-activity centre non-residential development complements Activity Centres the provision of services and facilities: (a) that support the needs of local residents and workers, particularly in undersolocations (b) at the edge of Activities Centres where they cannot readily be accommodate within an existing Activity Centre to expand the range of services on offer a support the role of the Activity Centre.	serviced sed

Resource Extraction

Assessment Provisions (AP)

Desired Outcome	
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Use a	and Intensity	
P01.1	DTS/DPF 1.1	
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.	
Water	Quality	
P0 2.1	DTS/DPF 2.1	
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.	
Separation Treatments, Buffers and Landscaping		
PO 3.1	DTS/DPF 3.1	
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.	
P0 3.2	DTS/DPF 3.2	
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.	

Site Contamination

Assessment Provisions (AP)

Desired Outcome	
DO 1	Ensure land is suitable for the proposed use in circumstances where it is or may have been subject to site contamination

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d):

Page 75 of 102 Printed on 3/02/2022

, , ,	
	(a) does not involve a change in the use of land
	 involves a change in the use of land that does not constitute a change to a more sensitive use
	 involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form)
	(d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following:
	(i) a site contamination audit report has been prepared under Part 10A of th Environment Protection Act 1993 in relation to the land within the previous 5 years which states that-
	A. site contamination does not exist (or no longer exists) at the land
	or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation)
	or C. where remediation is, or remains, necessary for the proposed us (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)
	and (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Tourism Development

Assessment Provisions (AP)

Desired Outcome	
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ge	neral
PO 1.1	DTS/DPF 1.1
Tourism development complements and contributes to local, natural, cultural or historical context where:	None are applicable.
(a) it supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature.	
PO 1.2	DTS/DPF 1.2
Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	None are applicable.
Caravan and	d Tourist Parks
P0 2.1	DTS/DPF 2.1
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.
P0 2.2	DTS/DPF 2.2
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.
PO 2.3	DTS/DPF 2.3
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.
P0 2.4	DTS/DPF 2.4
Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.

Page 76 of 102 Printed on 3/02/2022

- Chiquity	
PO 2.5	DTS/DPF 2.5
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development.	None are applicable.
P0 2.6	DTS/DPF 2.6
Long-term occupation does not displace tourist accommodation, particularly in important tourist destinations such as coastal and riverine locations.	None are applicable.
Tourist accommodation in areas constituted	under the National Parks and Wildlife Act 1972
PO 3.1	DTS/DPF 3.1
Tourist accommodation avoids delicate or environmentally sensitive areas such as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation lost through bushfire).	None are applicable.
P0 3.2	DTS/DPF 3.2
Tourist accommodation is sited and designed in a manner that is subservient to the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	None are applicable.
PO 3.3	DTS/DPF 3.3
Tourist accommodation and recreational facilities, including associated access ways and ancillary structures, are located on cleared (other than where cleared as a result of bushfire) or degraded areas or where environmental improvements can be achieved.	None are applicable.
PO 3.4	DTS/DPF 3.4
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.
(a) comprising a minimum of 10 accommodation units (b) clustering separated individual accommodation units (c) being of a size unsuitable for a private dwelling (d) ensuring functional areas that are generally associated with a private dwelling such as kitchens and laundries are excluded from, or physically separated from individual accommodation units, or are of a size unsuitable for a private dwelling.	

Transport, Access and Parking

Assessment Provisions (AP)

Desired Outcome		
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Movemen	nt Systems
PO 1.1	DTS/DPF 1.1
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.
P0 1.2	DTS/DPF 1.2
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.
PO 1.4	DTS/DPF 1.4
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.

Page 77 of 102 Printed on 3/02/2022

Sigh	tlines	
P0 2.1	DTS/DPF 2.1	
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.	
P0 2 2	DTS/DPF 2.2	
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.	
Vehicle	Access	
P0 3.1	DTS/DPF 3.1	
Safe and convenient access minimises impact or interruption on the operation of public	The access is:	
roads.	(a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.	
P0 3.2	DTS/DPF 3.2	
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	None are applicable.	
PO 3.3	DTS/DPF 3.3	
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.	
P0 3.4	DTS/DPF 3.4	
Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.	
PO 3.5	DTS/DPF 3.5	
Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads outside of the marked lines or infrastructure dedicating a pedestrian crossing.	
P0 3.6	DTS/DPF 3.6	
Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	Driveways and access points: (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.	
P0 3.7	DTS/DPF 3.7	
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.	
PO 3.8	DTS/DPF 3.8	
Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	None are applicable.	
PO 3.9	DTS/DPF 3.9	

Page 78 of 102 Printed on 3/02/2022

Policy24 - Enquiry		
Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	None are applicable.	
Access for People	e with Disabilities	
P0 4.1	DTS/DPF 4.1	
Development is sited and designed to provide safe, dignified and convenient access for	None are applicable.	
people with a disability.		
Vehicle Par	rking Rates	
PO 5.1	DTS/DPF 5.1	
Sufficient on-site vehicle parking and specifically marked accessible car parking places are	Development provides a number of car parking spaces on-site at a rate no less than the	
provided to meet the needs of the development or land use having regard to factors that	amount calculated using one of the following, whichever is relevant:	
may support a reduced on-site rate such as:	(a) Transport Access and Parking Table 1 - General Off-Street Car Parking	
(a) availability of on-street car parking	(a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements	
(b) shared use of other parking areas	(b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements	
(c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of	in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the	
vehicle parking may be shared	number of spaces calculated under (a) or (b) less the number of spaces offset by	
(d) the adaptive reuse of a State or Local Heritage Place.	contribution to the fund.	
Vehicle Par	rking Areas	
P0 6.1	DTS/DPF 6.1	
Vehicle parking areas are sited and designed to minimise impact on the operation of public	Movement between vehicle parking areas within the site can occur without the need to use	
roads by avoiding the use of public roads when moving from one part of a parking area to	a public road.	
another.		
P0 6.2	DTS/DPF 6.2	
Vehicle parking areas are appropriately located, designed and constructed to minimise	None are applicable.	
impacts on adjacent sensitive receivers through measures such as ensuring they are		
attractively developed and landscaped, screen fenced, and the like.		
PO 6.3	DTS/DPF 6.3	
Vehicle parking areas are designed to provide opportunity for integration and shared-use of	None are applicable.	
adjacent car parking areas to reduce the total extent of vehicle parking areas and access		
points.		
PO 6.4	DTS/DPF 6.4	
Pedestrian linkages between parking areas and the development are provided and are safe	None are applicable.	
and convenient.		
PO 6.5	DTS/DPF 6.5	
Vehicle parking areas that are likely to be used during non-daylight hours are provided with	None are applicable.	
sufficient lighting to entry and exit points to ensure clear visibility to users.		
PO 6.6	DTS/DPF 6.6	
Loading areas and designated parking spaces for service vehicles are provided within the	Loading areas and designated parking spaces are wholly located within the site.	
boundary of the site.	areas and designated parking spaces are mony routed main the site.	
D0.67	DTA/DDF / 7	
P0.6.7	DTS/DPF 6.7	
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.	
Undercroft and Below Ground G		
P0.7.1	DTS/DPF 7.1	
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with	None are applicable.	
other vehicles.		
	Control Control Control and Turk a Port	
Internal Roads and Parking Areas in Reside		
P0 8.1	DTS/DPF 8.1	
Internal road and vehicle parking areas are surfaced to prevent dust becoming a nuisance to park residents and occupants.	None are applicable.	
P0 8.2	DTS/DPF 8.2	
Traffic circulation and movement within the park is pedestrian friendly and promotes low	None are applicable.	
speed vehicle movement.		
Bicycle Parking in	Designated Areas	
PO 9.1	DTS/DPF 9.1	
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an	Areas and / or fixtures are provided for the parking and storage of dicycles at a rate not	

Page 79 of 102 Printed on 3/02/2022

active transport mode.	less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.	
PO 9.2	DTS/DPF 9.2	
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.	
Corner	Cut-Offs	
PO 10.1 Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram: Corner Cut-Off Area Allotment Boundary Road Reserve Road Reserve	

Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Davidsonnant	Car Darking Data (unless varied by Table 2 surrouds)
Class of Development	Car Parking Rate (unless varied by Table 2 onwards)
	Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Residential Development	
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
•	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Now Dwelling where vehicle access is from the primary street	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Row Dwelling where vehicle access is not from the primary street	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
(i.e. rear-loaded)	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Serial Section of Streeting	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Supported Accommodation	
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Supported accommodation	0.3 spaces per bed.

Page 80 of 102 Printed on 3/02/2022

- Shoy24 Enquiry		
Residential Development (Other)		
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.	
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling. Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.	
	0.2 spaces per dwelling for visitor parking.	
Student accommodation	0.3 spaces per bed.	
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.	
Tourist		
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.	
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.	
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.	
Tourist accommodation	1 car parking space per accommodation unit / guest room.	
Commercial Uses		
Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.	
Automotive collision repair	3 spaces per service bay.	
Call centre	8 spaces per 100m ² of gross leasable floor area.	
Motor repair station	3 spaces per service bay.	
Office	4 spaces per 100m ² of gross leasable floor area.	
Retail fuel outlet 3 spaces per 100m² gross leasable floor area.		
Service trade premises	2.5 spaces per 100m ² of gross leasable floor area	
	1 space per 100m ² of outdoor area used for display purposes.	
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.	
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.	
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.	
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.	
	Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.	
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.	
Community and Civic Uses		
Childcare centre	0.25 spaces per child	
Library	4 spaces per 100m ² of total floor area.	
Community facility	10 spaces per 100m ² of total floor area.	

Page 81 of 102 Printed on 3/02/2022

Hall / meeting hall	0.2 spaces per seat.	
Place of worship	1 space for every 3 visitor seats.	
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)	
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.	
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.	
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.	
Health Related Uses		
Hospital	4.5 spaces per bed for a public hospital.	
	1.5 spaces per bed for a private hospital.	
Consulting room	4 spaces per consulting room excluding ancillary facilities.	
Recreational and Entertainment Uses		
Cinema complex	0.2 spaces per seat.	
Concert hall / theatre	0.2 spaces per seat.	
Hotel	1 space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.	
Indoor recreation facility	6.5 spaces per 100m ² of total floor area for a Fitness Centre	
	4.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.	
Industry/Employment Uses		
Fuel depot	1.5 spaces per 100m ² total floor area	
	1 spaces per 100m ² of outdoor area used for fuel depot activity purposes.	
Industry	1.5 spaces per 100m ² of total floor area.	
Store	0.5 spaces per 100m ² of total floor area.	
Timber yard	1.5 spaces per 100m ² of total floor area	
	1 space per 100m ² of outdoor area used for display purposes.	
Warehouse	0.5 spaces per 100m ² total floor area.	
Other Uses		
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.	
Radio or Television Station	5 spaces per 100m ² of total building floor area.	

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

- (a) the location of the development is unable to satisfy the requirements of Table 2 Criteria (other than where a location is exempted from the application of those criteria) or
- (b) the development satisfies Table 2 Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate	Designated Areas

Page 82 of 102 Printed on 3/02/2022

- Enquiry			
		n one development type, then the overall car	
	type.	the car parking rates for each development	
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary	Capital City Zone
		Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the	City Main Street Zone
		maximum is:	City Riverbank Zone
		1 space for each dwelling with a total floor	Adelaide Park Lands Zone
		area less than 75 square metres	
		2 spaces for each dwelling with a total floor area between 75 square metres and 150	Business Neighbourhood Zone (within the City of Adelaide)
		square metres	The St Andrews Hospital Precinct Subzone and
		3 spaces for each dwelling with a total floor	Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
		area greater than 150 square metres.	the definition of definition 2016
		Residential flat building or Residential component of a multi-storey building: 1	
		visitor space for each 6 dwellings.	
Non-residential development	1		I
Non-residential development	2 angaga nay 1002 -f 1 1 1	E angese ner 1002 - f 1 1 - 7	City Living Zone
excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area.	
			Urban Corridor (Boulevard) Zone
			Urban Corridor (Business) Zone
			Urban Corridor (Living) Zone
			Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone
Non-residential development	3 spaces per 100m ² of gross leasable	6 spaces per 100m ² of gross leasable floor	Strategic Innovation Zone
excluding tourist accommodation	floor area.	area.	Suburban Activity Centre Zone
			Suburban Business Zone
			Business Neighbourhood Zone
			Suburban Main Street Zone
			Urban Activity Centre Zone
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms	City Living Zone
	bedrooms over 100 bedrooms	over 100 bedrooms	Urban Activity Centre Zone
			Urban Corridor (Boulevard) Zone
			Urban Corridor (Business) Zone
			Urban Corridor (Living) Zone
			Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone
Residential development		<u> </u>	I
	Dwalling with no concrete badance 0.05	None engeified	City Living Zono
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling	None specified.	City Living Zone
	1 bedroom dwelling - 0.75 spaces per		Strategic Innovation Zone
	dwelling		Urban Activity Centre Zone
	2 bedroom dwelling - 1 space per dwelling		Urban Corridor (Boulevard) Zone
	3 or more bedroom dwelling - 1.25 spaces		Urban Corridor (Business) Zone
	per dwelling		Urban Corridor (Living) Zone
	0.25 spaces per dwelling for visitor parking.		Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone

Page 83 of 102 Printed on 3/02/2022

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within Metropolitan Adelaide and any part of the development site satisfies one or more of the following: (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service ⁽²⁾ (b) is within 400 metres of a bus interchange ⁽¹⁾ (c) is within 400 metres of an O-Bahn interchange ⁽¹⁾ (d) is within 400 metres of a passenger rail station ⁽¹⁾ (e) is within 400 metres of a passenger tram station ⁽¹⁾ (f) is within 400 metres of the Adelaide Parklands.	(a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham (c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street) Zone (g) Urban Neighbourhood Zone

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

Class of Development	Bicycle Parking Rate
	Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
Educational establishment	For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors.
	For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
Hospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
Indoor recreation facility	1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.
Licensed Premises	1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
Office	1 space for every 200m ² of gross leasable floor area plus 2 spaces plus 1 space per 1000m ² of gross leasable floor area for visitors.
Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.
Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10

Page 84 of 102 Printed on 3/02/2022

	dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.	
Shop	1 space for every 300m ² of gross leasable floor area plus 1 space for every 600m ² of gross leasable floor area for customers.	
Tourist accommodation	1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	
Schedule to Table 3		
Designated Area	Relevant part of the State	
	The bicycle parking rate applies to a designated area located in a relevant part of the State described below.	
All zones	City of Adelaide	
Business Neighbourhood Zone	Metropolitan Adelaide	
Strategic Innovation Zone		
Suburban Activity Centre Zone		
Suburban Business Zone		
Suburban Main Street Zone		
Urban Activity Centre Zone		
Urban Corridor (Boulevard) Zone		
Urban Corridor (Business) Zone		
Urban Corridor (Living) Zone		
Urban Corridor (Main Street) Zone		
Urban Neighbourhood Zone		

Waste Treatment and Management Facilities

Assessment Provisions (AP)

Desired Outcome	
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting	
PO 1.1	DTS/DPF 1.1
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate off-site impacts from noise, air and dust emissions.	None are applicable.
Soil and Water Protection	
P0 2.1	DTS/DPF 2.1
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as: (a) containing potential groundwater and surface water contaminants within waste operations areas (b) diverting clean stormwater away from waste operations areas and potentially contaminated areas (c) providing a leachate barrier between waste operations areas and underlying soil and groundwater.	None are applicable.
P0 2.2	DTS/DPF 2.2

Page 85 of 102 Printed on 3/02/2022

- Chicken and Chic	
Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	Wastewater lagoons are set back 50m or more from watercourse banks.
P0 2 3	DTS/DPF 2.3
Wastewater lagoons are designed and sited to:	None are applicable.
(a) avoid intersecting underground waters; (b) avoid inundation by flood waters; (c) ensure lagoon contents do not overflow; (d) include a liner designed to prevent leakage.	
P0 2.4	DTS/DPF 2.4
Waste operations areas of landfills and organic waste processing facilities are set back from watercourses to minimise adverse impacts on water resources.	Waste operations areas are set back 100m or more from watercourse banks.
Am	enity
P0 3.1 Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity.	DTS/DPF 3.1 None are applicable.
PO 3.2	DTS/DPF 3.2
Access routes to waste treatment and management facilities via residential streets is avoided.	None are applicable.
PO 3.3	DTS/DPF 3.3
Litter control measures minimise the incidence of windblown litter.	None are applicable.
P0 3.4	DTS/DPF 3.4
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation.	None are applicable.
Aci	cess
PO 4.1	DTS/DPF 4.1
Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction.	None are applicable.
PO 4.2	DTS/DPF 4.2
Suitable access for emergency vehicles is provided to and within waste treatment or management sites.	None are applicable.
Fencing a	nd Security
PO 5.1	DTS/DPF 5.1
Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public.	Chain wire mesh or pre-coated painted metal fencing 2m or more in height is erected along the perimeter of the waste treatment or waste management facility site.
Lar	ndfill
P0 6.1	DTS/DPF 6.1
Landfill gas emissions are managed in an environmentally acceptable manner.	None are applicable.
P0 6.2	DTS/DPF 6.2
Landfill facilities are separated from areas of environmental significance and land used for public recreation and enjoyment.	Landfill facilities are set back 250m or more from a public open space reserve, forest reserve, national park or Conservation Zone.
PO 6.3	DTS/DPF 6.3
Landfill facilities are located on land that is not subject to land slip.	None are applicable.
P0 6.4	DTS/DPF 6.4
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Organic Waste Pr	ocessing Facilities
P0 7.1 Organic waste processing facilities are separated from the coast to avoid potential environment harm.	DTS/DPF 7.1 Organic waste processing facilities are set back 500m or more from the coastal high water mark.
P07.2	DTS/DPF 7.2
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect.	None are applicable.
PO 7.3	DTS/DPF 7.3
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.

Page 86 of 102 Printed on 3/02/2022

P0 7.4	DTS/DPF 7.4	
Organic waste processing facilities are located on land that is not subject to land slip.	None are applicable.	
P0 7.5	DTS/DPF 7.5	
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.	
Major Wastewater Treatment Facilities		
PO 8.1	DTS/DPF 8.1	
Major wastewater treatment and disposal systems, including lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	None are applicable.	
PO 8.2	DTS/DPF 8.2	
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	None are applicable.	

Workers' accommodation and Settlements

Assessment Provisions (AP)

Desired Outcome	
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.


Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
PO 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
P0 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

Part 12 - Concept Plans

Playford


Concept Plan 16 Angle Vale Infrastructure

Page 87 of 102 Printed on 3/02/2022

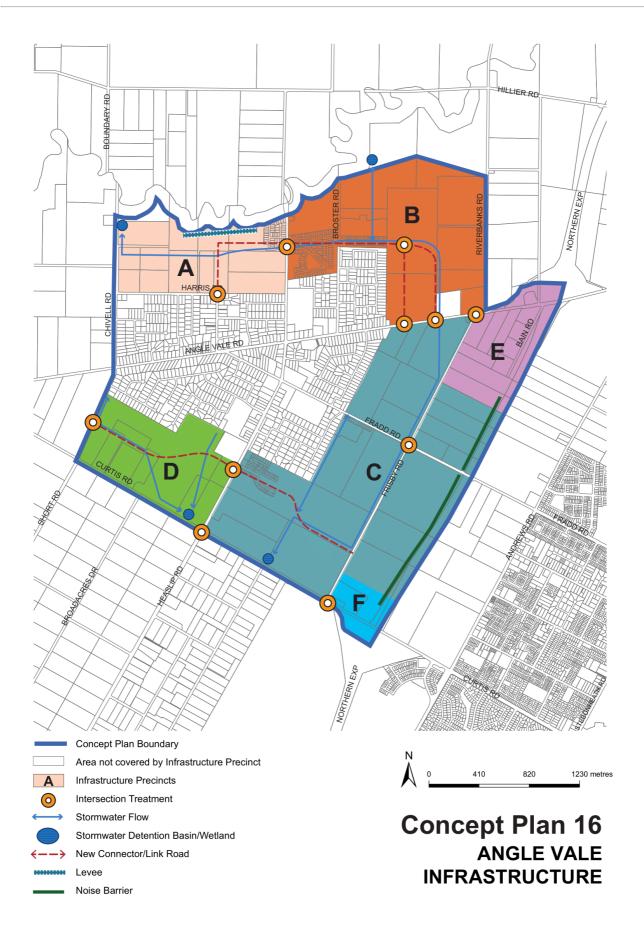


Page 88 of 102 Printed on 3/02/2022

Concept Plan 17 Angle Vale

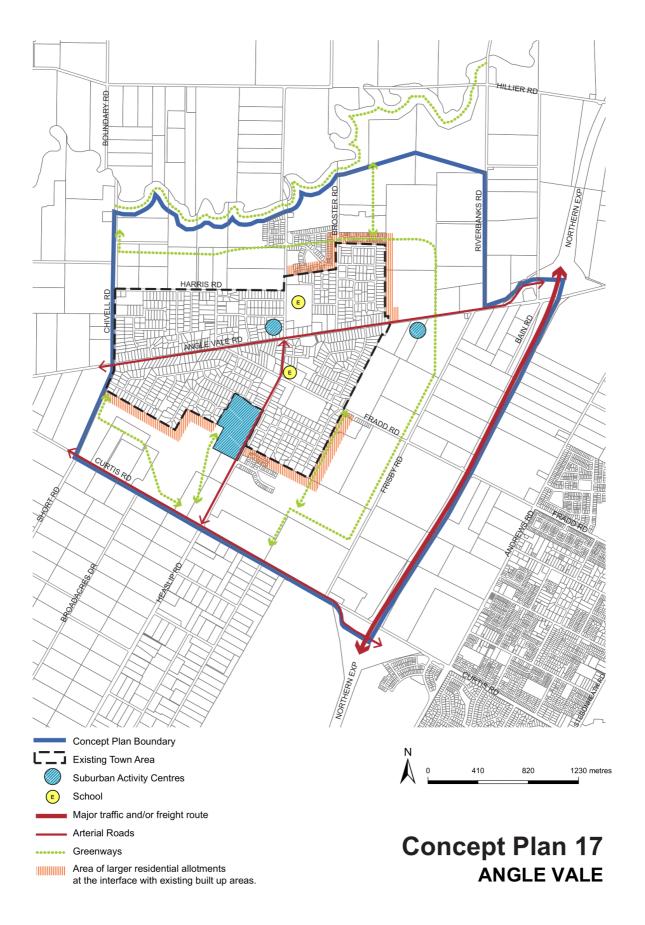

Page 89 of 102 Printed on 3/02/2022

Concept Plan 81 Edinburgh Defence Airfield Lighting Constraints

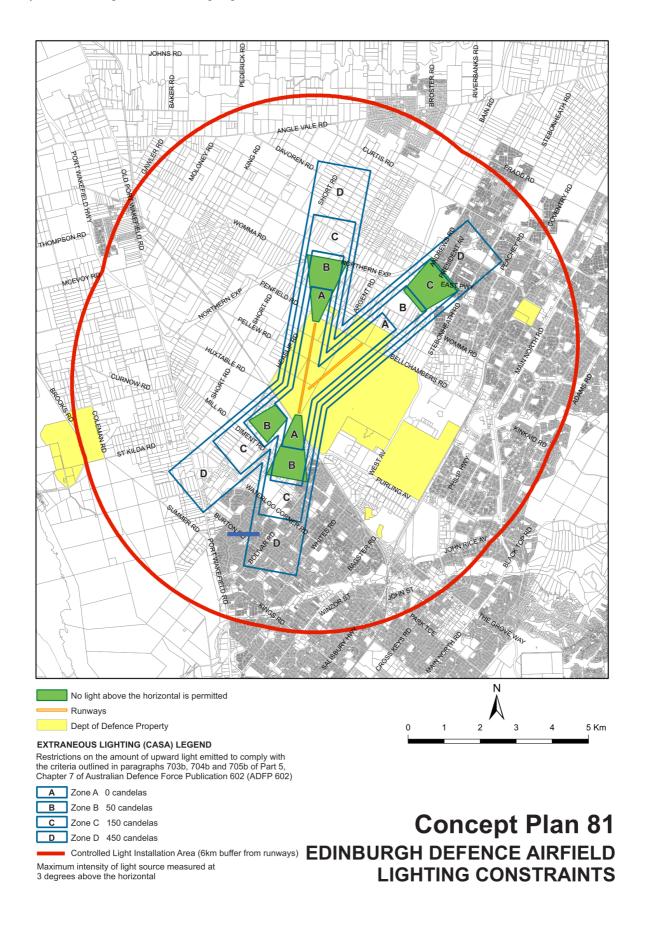

Page 90 of 102 Printed on 3/02/2022

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 91 of 102 Printed on 3/02/2022

Page 92 of 102 Printed on 3/02/2022

Page 93 of 102 Printed on 3/02/2022

Page 94 of 102 Printed on 3/02/2022

Page 95 of 102 Printed on 3/02/2022

Page 96 of 102 Printed on 3/02/2022

Page 97 of 102 Printed on 3/02/2022

Page 98 of 102 Printed on 3/02/2022

Page 99 of 102 Printed on 3/02/2022

Page 100 of 102 Printed on 3/02/2022

Page 101 of 102 Printed on 3/02/2022

Page 102 of 102 Printed on 3/02/2022